

## SSLV301 - Cylindrical beam comforts under load linearly distributed

---

### Summary:


The goal of the test is to validate a load linearly distributed, starting from an analysis 2D with decomposition in Fourier series of the load.

2 calculations here are carried out:

- 1) a calculation with the first 2 modes (0 and 1),
- 2) a calculation with the first 10 modes.

## 1 Problem of reference

### 1.1 Geometry

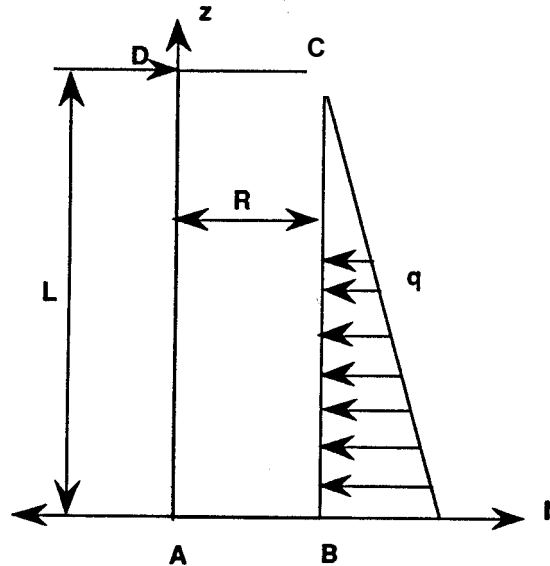

Length :  $L=0.240\text{ m}$   
Ray :  $R=0.006\text{ m}$

### 1.2 Material properties

$E=2.1 \times 10^{11}\text{ N/m}^2$   
 $\nu=0.3$

### 1.3 Boundary conditions and loadings

- Edge  $AB$  embedded
- Load varying linearly according to  $z$  on the generator  $BC$ , being worth:

$$q=0 \text{ in } C \text{ and } q=-3000\text{ N/m in } B$$

### 1.4 Initial conditions

Without object for the static analysis.

## 2 Reference solution

---

### 2.1 Method of calculating used for the reference solution

The reference solution is obtained analytically [bib1].

### 2.2 Results of reference

- 1) Radial displacement of the point  $C$  :  $u_{rc} = -1.552 \times 10^{-3} m$
- 2) Constraints of embedding at the point  $B$  :  $\sigma_{zz}(B) = 169.8 \times 10^6 Pa$

### 2.3 Uncertainty on the solution

Analytical solution.

### 2.4 Bibliographical reference


- 1) S. TIMOSHENKO: Resistance of materials, 1st part. Polytechnic bookstore CH. Béranger, Paris, 1947

## 3 Modeling A

### 3.1 Characteristics of modeling

AXIS\_FOURIER, T6 nets

Cutting: 80 elements according to the length  
2 elements in the thickness

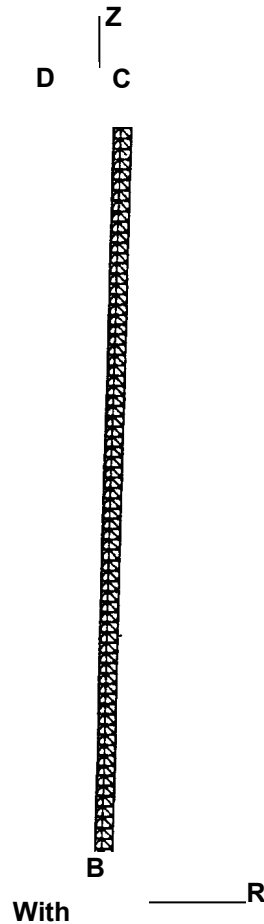

### 3.2 Characteristics of the grid

Many nodes: 805  
Many meshes and types: 320 TRIA6

### 3.3 Values tested

Values provided for  $\theta=0$  .

Localization	Type of value	Reference	Aster	% difference
Calculation 1 (2 modes)				
Not C	$u_r(m)$	$-1.552 \times 10^{-3}$	$-1.54839 \times 10^{-3}$	- 0,232
Not B	$\sigma_{zz}(Pa)$	$169.8 \times 10^6$	$168.73 \times 10^6$	- 0.63

Warning : The translation process used on this website is a "Machine Translation". It may be imprecise and inaccurate in whole or in part and is provided as a convenience.

Copyright 2019 EDF R&D - Licensed under the terms of the GNU FDL (<http://www.gnu.org/copyleft/fdl.html>)

---

Calculation modes)	2	(10			
Not $C$		$u_r(m)$	$-1.552 \times 10^{-3}$	$-1.54839 \times 10^{-3}$	- 0,232
Not $B$		$\sigma_{zz}(Pa)$	$169.8 \times 10^6$	$168.59 \times 10^6$	- 0.71

## 3.4 Notice

The values of the arrow of the beam and the constraint of embedding are obtained with precision with the first two modes only.

## 4 Summary of the results

---

The results resulting from calculation are in concord with the analytical solution.