
SSNP165 – Boxing ring one block


Summary:

This test consists in crushing a half-ring on a block with a condition of contact between the two. There are two modelings in plane deformation, with and without friction. The validation is in not-regression. This test is very discriminating on the advanced methods Lagrangian type increased with generalized Newton. It is inspired by the digital example 'Elastic boxing ring and block' of the publication [1] .

1 Problem of reference

1.1 Geometry

The half-ring consists of two parts interior and external, the same thickness 5 mm . The ray of neutral fibre is of 95 mm . The block is a rectangle of dimensions 50 mm by 250 mm . The initial distance between the block and the half-ring is of 20 mm .

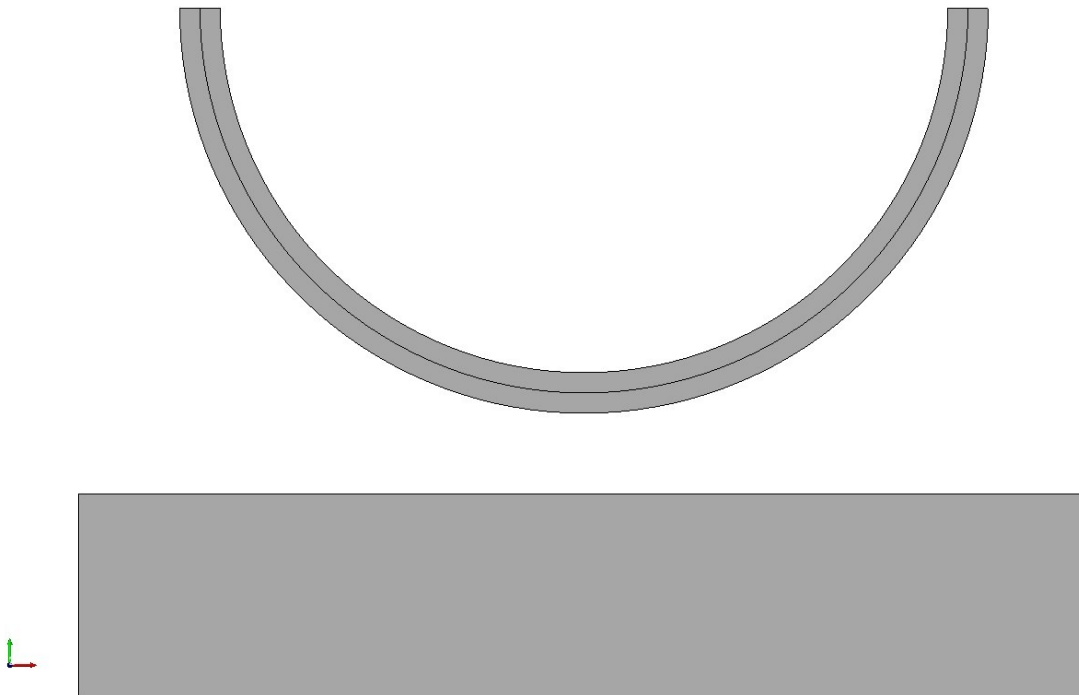

1.2 Properties of material

The law of behavior used is elastoplastic with linear isotropic work hardening (VMIS_ISOT_LINE). The material of the interior part of the ring is characterized by:

- $E = 100\,000\text{ MPa}$
- $\nu = 0.3$
- $\rho = 2.7\text{E} - 5\text{ kg.mm}^{-3}$
- $D_SIGM_EPSI = 9.0\text{E}4\text{ MPa}$
- $S\dot{Y} = 10.\text{E}100\text{ MPa}$

The material of the part external of the ring is characterized by:

- $E = 1\,000\text{ MPa}$
- $\nu = 0.3$
- $\rho = 2.7\text{E} - 5\text{ kg.mm}^{-3}$
- $D_SIGM_EPSI = 9.0\text{E}2\text{ MPa}$
- $S\dot{Y} = 10.\text{E}100\text{ MPa}$

The material of the block is characterized by:

- $E = 300\text{ MPa}$
- $\nu = 0.3$
- $\rho = 2.7\text{E} - 5\text{ kg.mm}^{-3}$

- $D_SIGM_EPSI = 10.MPa$
- $SY = 10.E100 MPa$

1.3 Boundary conditions and loadings

The lower edge of the block is blocked such as $DX = DY = 0$.

A displacement $DX = 0$ and $DY = -90 mm$ is imposed at the two ends, in the plan XZ , half-ring.

2 Reference solution

2.1 Sizes and results of reference

This test is a test of not-regression.

2.2 Bibliographical references

- [1] *With mortar-based frictional broad contact for formulation deformations using Lagrange multipliers*, Mr. Tur, F.J. Fuenmayor, P. Wriggers, 2009.


3 Modeling A

3.1 Characteristics of modeling

A modeling is used `D_PLAN`.
The contact between the half-ring and the block is without friction.

3.2 Characteristics of the grid

The grid contains 240 elements of the type `QUAD4`.

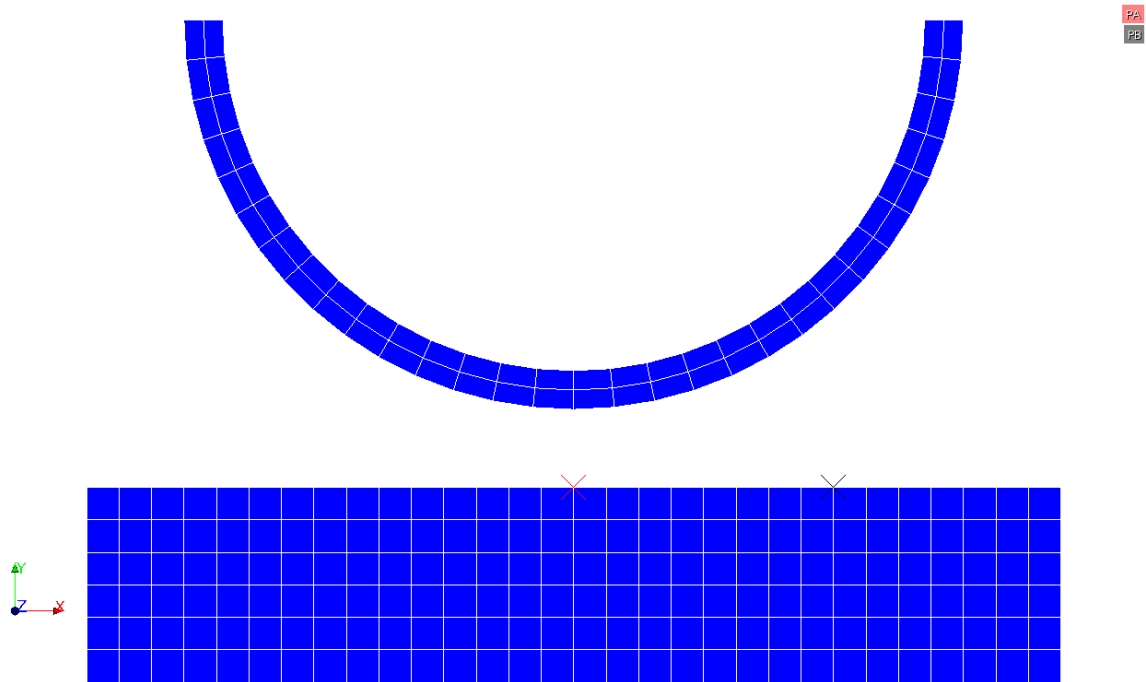

3.3 Sizes tested and results

One tests displacement on two points of the zone of contact. The point *A* , located at the medium in $X=125\text{ mm}$ and the point *B* , located in $X=23/30*250\text{ mm}$, the goal being to have always one of the two points in contact lasting calculation, in spite of the deformation of the half-ring.

Identification	Type of reference	Tolerance
Not <i>A</i> - <i>DX</i>	'NON_REGRESSION'	0,001%
Not <i>A</i> - <i>DY</i>	'NON_REGRESSION'	0,001%
Not <i>A</i> - LAGS_C	'NON_REGRESSION'	0,001%
Not <i>B</i> - <i>DX</i>	'NON_REGRESSION'	0,001%
Not <i>B</i> - <i>DY</i>	'NON_REGRESSION'	0,001%
Not <i>B</i> - LAGS_C	'NON_REGRESSION'	0,001%

4 Modeling B


4.1 Characteristics of modeling

A modeling is used `D_PLAN`.

The contact between the half-ring and the block is with friction. The coefficient of friction of Coulomb is of 0,5 .

4.2 Characteristics of the grid

The grid contains 240 elements of the type `QUAD4`.

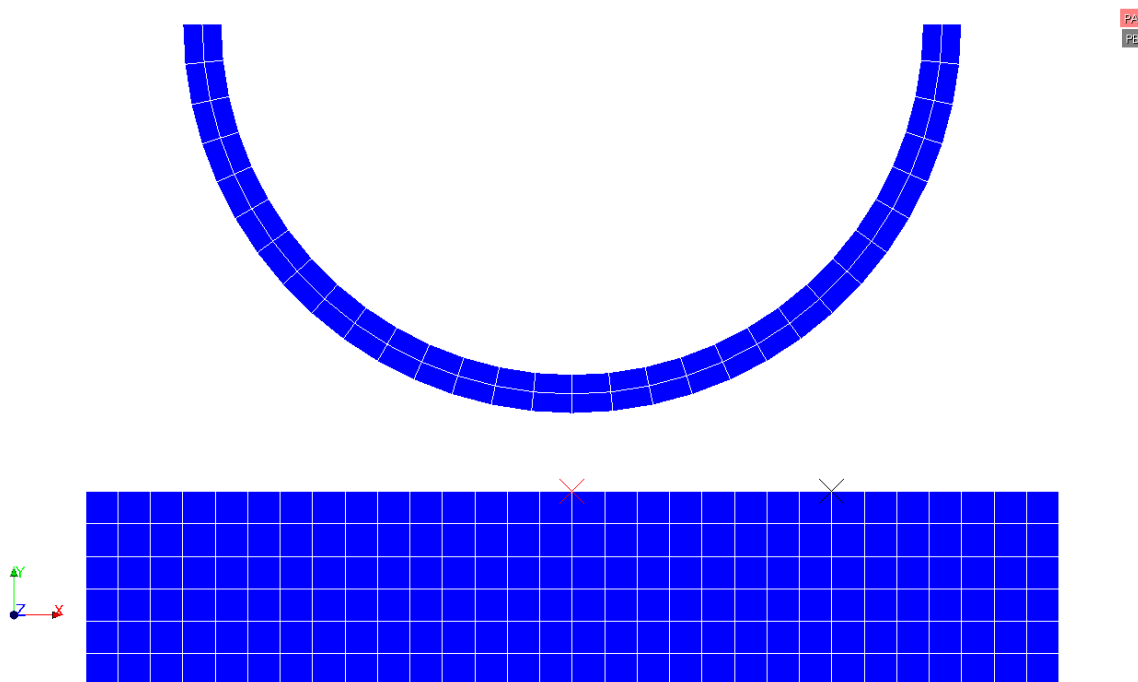

4.3 Sizes tested and results

One tests displacement on two points of the zone of contact. The point *A* , located at the medium in $X = 125\text{ mm}$ and the point *B* , located in $X = 23/30 * 250\text{ mm}$, the goal being to have always one of the two points in contact lasting calculation, in spite of the deformation of the half-ring.

Identification	Type of reference	Tolerance
Not <i>A</i> - <i>DX</i>	'NON_REGRESSION'	0,001%
Not <i>A</i> - <i>DY</i>	'NON_REGRESSION'	0,001%
Not <i>A</i> - <i>LAGS_C</i>	'NON_REGRESSION'	0,001%
Not <i>B</i> - <i>DX</i>	'NON_REGRESSION'	0,001%
Not <i>B</i> - <i>DY</i>	'NON_REGRESSION'	0,001%
Not <i>B</i> - <i>LAGS_C</i>	'NON_REGRESSION'	0,001%

5 Summary of the results

The observation of the deformations makes it possible to conclude that the solution calculated by Code_Aster is in agreement with that presented in reference [1].