

## HSSL100 – Bi--embedded beam multifibre subjected to a field of temperature

---


### Summary

This test makes it possible to validate the good taking into account of the temperature for the law of behavior ELAS in the case of a beam multifibre. This test makes it possible to check that thermal dilation is well calculated.

## 1 General characteristics

### 1.1 Geometry

It is about a beam fixed at its two ends.

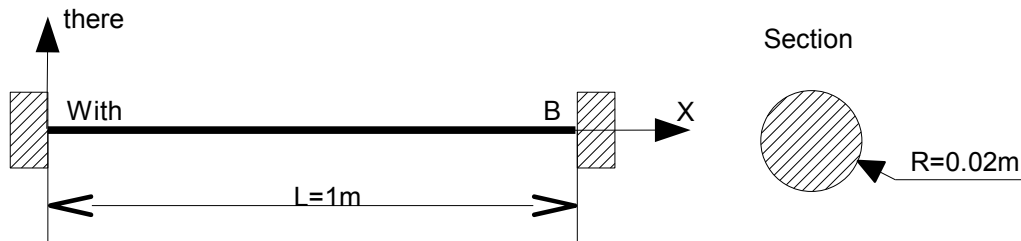


### 1.2 Properties of materials

$E = 2.0 \text{ E}+11 \text{ Pa}$	Young modulus
$\nu = 0.3$	Poisson's ratio
$\alpha = 15.0 \text{ E}-06 / ^\circ \text{C}$	Dilation coefficient
$D\_SIGM\_EPSI = 2.0 \text{ E}+09 \text{ Pa}$	Slope of the traction diagram
$S\bar{Y} = 150.0 \text{ E}+10 \text{ Pa}$	Elastic limit

### 1.3 Boundary conditions and loadings

Embedding at the points  $A$  and  $B$  :  $DX = DY = DZ = DRX = DRY = DRZ = 0$   
Imposed temperature:  $T = 400^\circ \text{C}$

The imposed temperature is increasing linearly according to time.

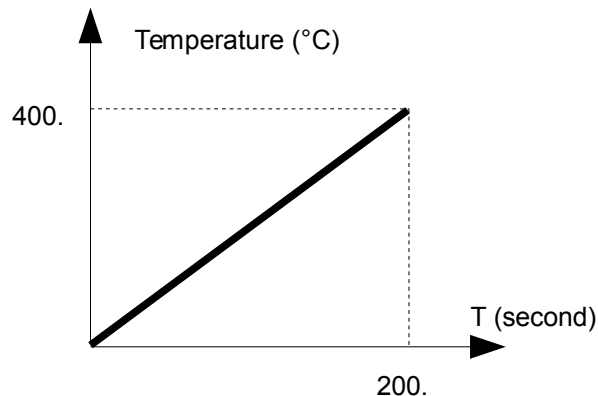

### 1.4 Initial conditions

Temperature of reference:  $0^\circ \text{C}$

## 2 Reference solution

---

### 2.1 Method of calculating used for the reference solution

Embedding at the points  $A$  and  $B$  allows to block the deformations according to  $x : \varepsilon_{xx} = 0$ . This blocking associated with Lhas imposed temperature creates an axial stress of compression along the axis  $x$ . This constraint has as an expression:

$$\sigma_{xx} = E \alpha (T_{reference} - T)$$

### 2.2 Reference variables

Constraint  $SIXX$

### 2.3 Result of reference

For  $T = 200^\circ C$  one obtains  $SIXX = -0.6 E+09 Pa$

For  $T = 400^\circ C$  one obtains  $SIXX = -1.20 E+09 Pa$


### 2.4 Uncertainty on the solution

Analytical solution

## 3 Modeling A

### 3.1 Characteristics of modeling

Modeling POU\_D\_EM  
Relation of behavior of ELAS



Grid of the beam  
Many nodes 11  
Many meshes 10  
That is to say:SEG2 10

Grid of the section of the beam  
Many nodes 96  
Many meshes 160  
That is to say:TRIA3 160

### 3.2 Results

Behavior ELAS.

Size	Mesh	Not	Under-point	moment	Reference	Tolerance (%)
SIXX	M4	1	120	50.	0.60 E+09 Pa	0.1
SIXX	M9	2	40	100.	1.2 E+09 Pa	0.1

Behavior VMIS\_ISOT\_LINE.

Size	Mesh	Not	Under-point	moment	Reference	Tolerance (%)
SIXX	M4	1	120	50.	0.60 E+09 Pa	0.1
SIXX	M9	2	40	100.	1.20 E+09 Pa	0.1

The behavior of the beam during calculations with the law of behavior VMIS\_ISOT\_LINE Reste rubber band.

## 4 Summary of the results

---

The results are in conformity with the analytical solution.