

## ZZZZ110 - Validation of order PROJ\_CHAMP/ELEM (in 2D and telegraphic)

---

### Summary:

This CAS-test makes it possible to validate the order PROJ\_CHAMP/ELEM in the following cases:

Projection of a field of temperature (modelings  $A$  and  $B$ ) :

- Projection of a grid 2D on another grid 2D
- Projection of a grid 2D on a telegraphic grid 1D
- Projection of a grid 1D telegraphic on a grid 2D
- Projection of a grid 2D *axis* on a solid 3D



Projection of a stress field (modelings  $A$  and  $B$ ) :

- Projection of a grid 2D *axis* on a solid 3D
- Projection of a grid 3D on a solid 3D


## 1 Problem of reference

### 1.1 Modeling A


#### 1.1.1 Geometry



*Carre1/carre2*



*AC*



*cube1*

Coordinates of the points (*m*) :

*A* : (0., 0.)

*B* : (1., 0.)

*C* : (0., 0.)

*D* : (0., 1.)

Geometry of the cube:

Center: (0., 0., -0.5)

Side:  $L = 1$

Group of meshes:

*carre1* surface *A, B, C, D*

*carre2* surface *A, B, C, D*

*AC* segment *AC*

*cube1* volume

#### 1.1.2 Properties of material

Without object

#### 1.1.3 Boundary conditions and loadings

Without object

## 1.2 Reference solution

### 1.2.1 Method of calculating

#### Calculation of the reference for the field of temperature

The field which one projects of a model on the other is an analytical field of temperature whose evolution is the following one:

$$T = 3. + X + Y$$

The reference solution is identical to the analytical field project.

#### Calculation of the reference for the stress field

The objective is to carry out a change of reference mark, after having carried out a projection of a stress field known on a grid towards a grid 3D.

Passage d' a cylindrical reference mark (  $XOY$  ) towards a Cartesian reference mark 3D (  $XYZ$  ).

The stress field (  $N/m^2$  ) in the axisymmetric reference mark (axis  $OY$  ) is the following:

- $S_{IXX} = 2$
- $S_{IYY} = y$
- $S_{IZZ} = 1$
- $S_{IXY} = 0.$

The stress field in the Cartesian reference mark ( 3D ) is obtained while carrying out:

- A projection of the tensor of the constraints evaluated on the grid 2D *axis* on the grid 3D.
- Change of reference mark of the tensor of the constraints  $[\sigma_{3D}] = [P][\sigma_{cyl}][P]^T$  or  $[P]$  represent the matrix of change of reference mark.

The digital results are the following:

NODE	X	Y	Z	S <sub>IXX</sub>	S <sub>IYY</sub>	S <sub>IZZ</sub>
N258	-1/3	-1/3	1/6	1.5	1.5	1/6
N33	-1/3	0.	1.	2.	1.	1.
N108	0.	1/2	2/3	1.	2.	2/3.


## 1.2.2 Results of reference

Type of projection	Not	Size (°C)	Reference
<i>carre1</i> → <i>carre2</i>	<i>A</i>	<i>TEMP</i>	3
	<i>B</i>	<i>TEMP</i>	4
	<i>C</i>	<i>TEMP</i>	5
	<i>N364</i>	<i>TEMP</i>	4.66
<i>carre2</i> → <i>carre1</i>	<i>A</i>	<i>TEMP</i>	3
	<i>B</i>	<i>TEMP</i>	4
	<i>C</i>	<i>TEMP</i>	5
	<i>N355</i>	<i>TEMP</i>	3.75
<i>carre2</i> → <i>AC</i>	<i>A</i>	<i>TEMP</i>	3
	<i>C</i>	<i>TEMP</i>	5
	<i>N356</i>	<i>TEMP</i>	4
<i>AC</i> → <i>carre2</i>	<i>A</i>	<i>TEMP</i>	3
	<i>B</i>	<i>TEMP</i>	4
<i>carre2</i> → <i>cube1</i>	<i>C</i>	<i>TEMP</i>	5
	<i>N363</i>	<i>TEMP</i>	3.33
	<i>N341</i>	<i>TEMP</i>	3.69371

Type of projection	Not	Size (N/m <sup>2</sup> )	Reference
<i>carre2</i> → <i>cube1</i>	<i>N258</i>	<i>SIXX</i>	1.5
	<i>N258</i>	<i>SIYY</i>	1.5
	<i>N258</i>	<i>SIZZ</i>	0.16
	<i>N33</i>	<i>SIXX</i>	2
	<i>N33</i>	<i>SIYY</i>	1
	<i>N33</i>	<i>SIZZ</i>	1
	<i>N108</i>	<i>SIXX</i>	1
	<i>N108</i>	<i>SIYY</i>	2
	<i>N108</i>	<i>SIZZ</i>	0.66

## 1.3 Modeling B

### 1.3.1 Geometry

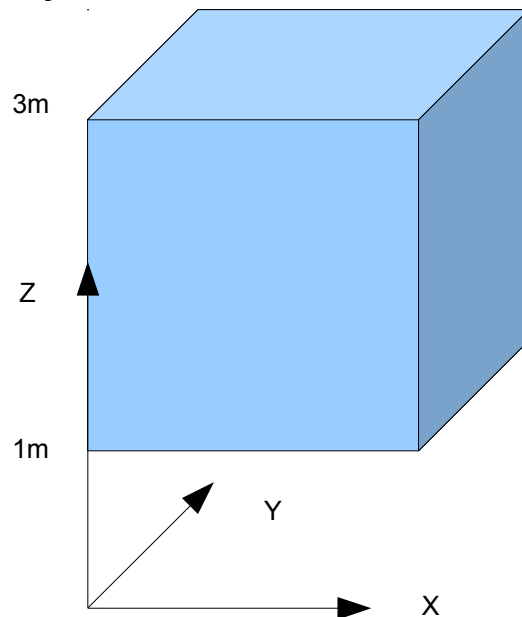

Cubic on side:  $L=2$

### 1.3.2 Properties of material

- $E=2 \text{ N/m}^2$
- $\nu=0$ .

### 1.3.3 Boundary conditions and loadings

Imposed displacements

- plan  $z=1\text{m}$   $DX=0.=DY=0.=DZ=0.$
- plan  $z=3\text{m}$   $DZ=2.\text{m}$

## 1.4 Reference solution

### 1.4.1 Method of calculating

The Poisson's ratio is null  $\nu = 0$  what gives us

$$\sigma_{xx} = \sigma_{yy} = \sigma_{xy} = \sigma_{xz} = \sigma_{yz} = 0$$

$$\sigma_{zz} = E \epsilon = E \frac{DZ}{L}$$

### 1.4.2 Results of reference

$SIZZ = 2 \text{ N/m}^2$  In any point of the cube

## 2 Modeling A


### 2.1 Characteristics

Modeling PLAN for *carre1* :

Many nodes 9  
Many meshes 4

That  
is to  
say:

QUAD8 4




Modeling PLAN for *carre2* :

Many nodes 16  
Many meshes 18

That  
is to  
say:

TRIA3 18




Modeling COQUE\_PLAN for *AC* :

Many nodes 3  
Many meshes 1

That  
is to  
say:

SEG3 1




Modeling 3D for *cube1* :

Many nodes 341  
Many meshes 252

That  
is to  
say:

QUAD4 36  
HEXA8 216



## 2.2 Results

Projection	Not	Size ( $^{\circ}C$ )	Reference	Tolerance (%)
<i>carre1</i> → <i>carre2</i>	<i>A</i>	<i>TEMP</i>	3	0.1
	<i>B</i>	<i>TEMP</i>	4	0.1
	<i>C</i>	<i>TEMP</i>	5	0.1
	<i>N364</i>	<i>TEMP</i>	4.66	0.1
<i>carre2</i> → <i>carre1</i>	<i>A</i>	<i>TEMP</i>	3	0.1
	<i>B</i>	<i>TEMP</i>	4	0.1
	<i>C</i>	<i>TEMP</i>	5	0.1
	<i>N355</i>	<i>TEMP</i>	3.75	0.1
<i>carre2</i> → <i>AC</i>	<i>A</i>	<i>TEMP</i>	3	0.1
	<i>C</i>	<i>TEMP</i>	5	0.1
	<i>N356</i>	<i>TEMP</i>	4	0.1
<i>AC</i> → <i>carre2</i>	<i>A</i>	<i>TEMP</i>	3	0.1
	<i>B</i>	<i>TEMP</i>	4	0.1
	<i>C</i>	<i>TEMP</i>	5	0.1
	<i>N363</i>	<i>TEMP</i>	3.33	0.1
<i>carre2</i> → <i>cubel</i>	<i>N341</i>	<i>TEMP</i>	3.69371	0.1


Projection	Not	Size ( $N/m^2$ )	Reference	Tolerance (%)
<i>carre2</i> → <i>cubel</i>	<i>N258</i>	<i>SIXX</i>	1.5	0.1
	<i>N258</i>	<i>SIYY</i>	1.5	0.1
	<i>N258</i>	<i>SIZZ</i>	0.16	0.1
	<i>N33</i>	<i>SIXX</i>	2	0.1
	<i>N33</i>	<i>SIYY</i>	1	0.1
	<i>N33</i>	<i>SIZZ</i>	1	0.1
	<i>N108</i>	<i>SIXX</i>	1	0.1
	<i>N108</i>	<i>SIYY</i>	2	0.1
	<i>N108</i>	<i>SIZZ</i>	0.66	0.1



## 3 Modeling B

### 3.1 Characteristics of modeling B

Grid MA1:

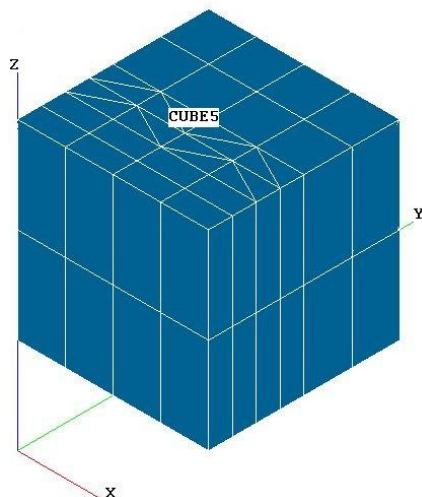


Modeling 3D:

Many nodes	361
Many meshes	204

That  
is to  
say:

SEG2	38
TRIA3	8
QUAD4	28
TETRA4	22
TETRA10	22
PENTA6	16
PENTA15	16
PYRAM5	14
PYRAM13	14
HEXA8	13
HEXA20	13

## Grid MA2:

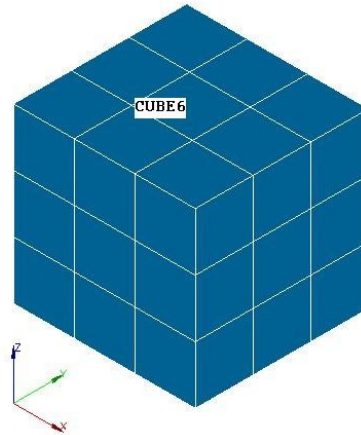

### Modeling 3D:

Many nodes	64	
Many meshes	39	That is to say:
		SEG2      3
		QUAD4     9
		HEXA8    27

## 3.2 Results

Projection	Moment	Mesh	Not Gauss n°	Size ( $N/m^2$ )	Reference	Tolerance (%)
<i>MA1</i> → <i>MA2</i>	3.2	M3	1	<i>SIXX</i>	0.	0.1
		M3	1	<i>SIYY</i>	2.	1.
		M7	1	<i>SIXX</i>	0.	0.1
		M7	1	<i>SIYY</i>	2.	1.

## 4 Summary of the results

---

The got results are very satisfactory, they made it possible to check in the following situations:

The projection of a field of temperature:

- Projection of a grid 2D on another grid 2D
- Projection of a grid 2D on a telegraphic grid 1D
- Projection of a grid 1D telegraphic on a grid 2D
- Projection of a grid 2D *axis* on a solid 3D

The projection of a stress field :

- Projection of a grid 2D *axis* on a solid 3D
- Projection of a grid 3D on a solid 3D