

SSLL100 - Symmetrical structure of beams with an elbow


Summary:

This test in statics, linear elasticity makes it possible to validate the elements of beam right-hand sides in cross-bending, as well as the discrete elements. Four loadings are defined, of which some in local reference mark.

The reference solution is resulting from the file of validation of the code `LICE` (except in the case of loading 5 where it is about not-regression). Results got with `Code_Aster` are rather close to the reference, variation about 3% .

1 Problem of reference

1.1 Geometry

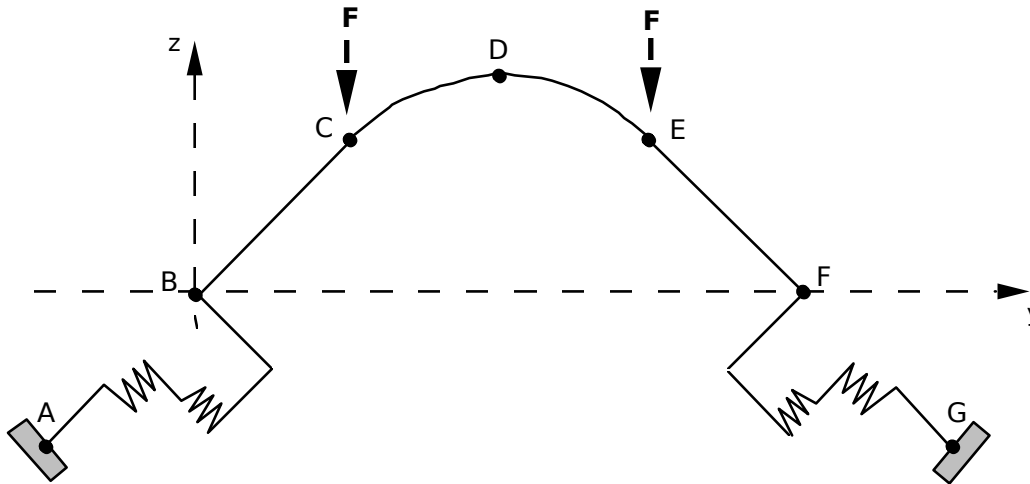

Symmetrical plane structure compared to the line $y=4$.

Beams of section	circular	external diameter	$de=0.04\text{ m}$
		internal diameter	$di=0.01\text{ m}$
Elbow	of center	($y=4\ z=0$)	and of ray = $2\sqrt{2}\text{ m}$
Connection node-node		$Kx=Kz=10^5\text{ N/m}$	in the local reference mark

Coordinates of the points (in m):

	A	B	C	D	E	F	G
x	0.	0.	0.	0.	0.	0.	0.
y	-2.	0.	2.	4.	6.	8.	10.
z	-2.	0.	2.	$2\sqrt{2}$	2.	0.	-2.

1.2 Material properties

Young modulus: $E=2.1\ 10^{11}\text{ Pa}$

Poisson's ratio: $\nu=0.3$

Density: $\rho=7800.\text{ kg/m}^3$

Thermal dilation coefficient: $\alpha=10^{-6}\text{ m/}^\circ\text{C}$

1.3 Boundary conditions and loadings

Points A and G embedded ($v=w=0$) (except in the case of load 2)

Loading:

- 1) loading concentrated in C and E $F=1000\text{ N}$
- 2) displacement imposed in A and G $Dx=\sqrt{2}$ in local reference mark of the meshes AB and GF
- 3) thermal dilation with $t=100\text{ }^\circ\text{C}$
- 4) actual weight
- 5) material dependent on T

2 Reference solution

2.1 Method of calculating used for the reference solution

The reference solution is that given in the card of validation STA.MPACO/B code LICE of EDF R & D [bib1], except in the case of loading 5 where it is about not-regression.

2.2 Results of reference

Displacements of the points B , C and D .

2.3 Uncertainty on the solution

- modeling B : some % (digital solution function of the discretization).

2.4 Bibliographical references

1. Computer code of structures of beam LICE. Card of validation of module EFPOU MPACO/B - Direction of the Studies and Research E.D.F (1988)

3 Modeling B

3.1 Characteristics of modeling

The arc of beam was modelled in a polygonal line of 2×20 SEG2.

Limiting conditions:

```
DDL_IMPO= _F (GROUP_NO=' Npoutre', DX= 0.0, DRY= 0.0, DRZ= 0.)  
_F (NOEUD= ('WITH', 'G), DX= 0.0, DY= 0.0, DZ= 0. )
```

except for loading case 2

```
(NOEUD=' A', DX= 0.0, DY= 1.0, DZ= 1.0)  
(NOEUD=' G', DX= 0.0, DY=-1.0, DZ= 1.0)
```

loading case 1

```
FORCE_NODALE= _F (NOEUD= ('C', 'D'), Fz = -1000.0)
```

loading case 3: Loading in temperature via the order AFFE_MATERIAU

```
AFFE_VARC= _F ( NOM_VARC=' TEMP', VALE_REF=0., EVOL=TEMP,  
TOUT=' OUI', NOM_CHAM=' TEMP',),)
```

loading case 4

```
PESANTEUR= _F ( GRAVITE=9.81,  
DIRECTION= (0. , 0. , - 1.))
```

Name of the nodes: *A, B, C, D, E, F*

3.2 Characteristics of the grid

Many nodes: 45

Many meshes and types: 44 SEG2

3.3 Sizes tested and results

Case	Not	displacement (m)	Reference	Aster	%diff	tolerance
1	<i>B</i>	v_B	- 8.120E-3	- 8.1209E-3	0.01	1.E-3
		w_B	- 1.000E-2	- 1.0000E-2	0.00	
Forces nodal	<i>C</i>	v_C	7.389E-3	7.3863E-3	- 0.04	
		w_D	- 2.553E-2	- 2.5528E-2	- 0.01	
2	<i>B</i>	v_B	9.858E-1	9.8585E-1	- 0.00	1.E-3
		w_B	1,000	1.0000	- 0.00	
Displacement imposed	<i>C</i>	v_C	1.738E-1	1.7374E-1	- 0.04	
		w_D	1,812	1.8121	0.	
3	<i>B</i>	v_B	- 5.660E-6	- 5.6612E-6	0.02	1.E-3
		w_B				
Dilation	<i>C</i>	v_C	- 1.305E-4	- 1.3051E-4	0.01	
		w_D	5.248E-4	5.2484E-4	0.01	
4	<i>B</i>	v_B	- 3.111E-3	- 3.1145E-3	0.11	5.E-3
		w_B	- 4.552E-3	- 4.5521E-3	0.00	
Gravity	<i>C</i>	v_C	1.180E-3	1.1409E-3	- 3.31	5.E-2
		w_D	- 8.850E-3	- 8.8148E-3	- 0.40	

3.4 Remarks

The modeling of the elbow by right elements requires a very fine grid, for a sufficient precision (in particular for a loading distributed).

4 Summary of the results

Results got with *Code_Aster* coincide well with those of the code LICE (reference solution).

For modeling B , they are very close ($< 4.0 \cdot 10^{-4}$) except in the case of load of gravity, 3% of variation to the maximum, because of the dependence of the solution to the smoothness of discretization.