

## HPLV100 - Parallelepiped of which the Young modulus is function of the temperature

---


### Summary

This thermoelastic calculation compares the solution provided by *Code\_Aster* with an analytical solution when the Young modulus varies in a nonlinear way compared to the temperature.

Modeling does not have anything physics and is described in [V7.90.01].

## 1 Problem of reference

### 1.1 Geometry

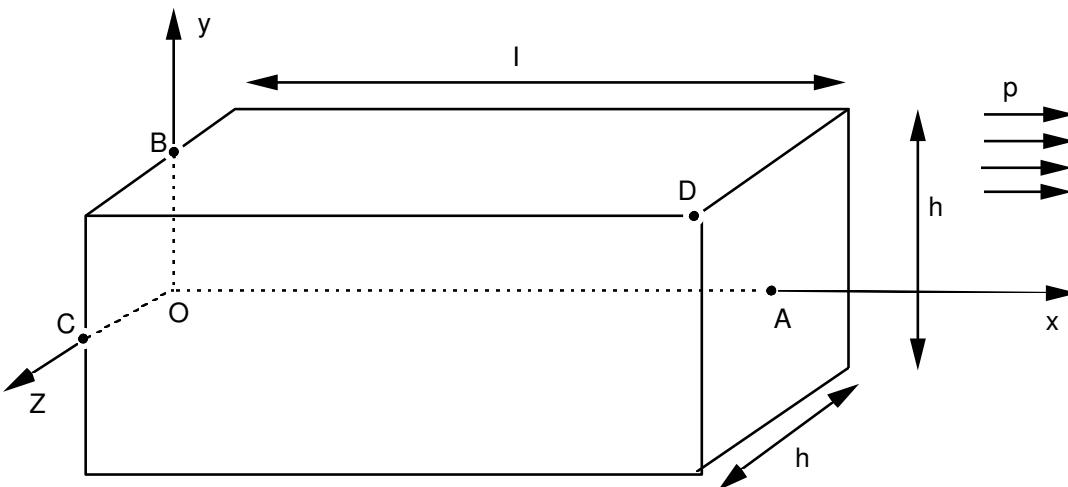

$$l = 20, \quad h = 10, \quad O = (0, 0, 0), \quad A = (20, 0, 0), \quad D = (20, 5, 5)$$

### 1.2 Material properties

Thermal conductivity:  $\lambda = 1$ .

Young modulus:  $E = \frac{1000}{800 - T}$  ( $T$  being the temperature)

Poisson's ratio:  $\nu = 0.3$

### 1.3 Boundary conditions and loadings

- Thermics

$$\begin{aligned} T(A) = 0, \quad \lambda \frac{\partial T}{\partial n} &= -2 \text{ pour } x = l \\ &= +2 \text{ pour } x = 0 \\ &= -3 \text{ pour } y = h/2 \\ &= +3 \text{ pour } y = -h/2 \\ &= -4 \text{ pour } z = h/2 \\ &= +4 \text{ pour } z = -h/2. \end{aligned}$$

$n$  étant la normale sortante.

- Mechanics:

$$\begin{aligned} u_x(O) = u_y(O) = u_z(O) &= 0 \\ u_x(B) = u_x(C) = u_z(B) &= 0. \end{aligned}$$

- Pressure:

$$p = 1.$$

## 2 Reference solution

### 2.1 Method of calculating used for the reference solution

$$T = -2x - 3y - 4z + 40$$

On a donc :  $E = \frac{1000}{2x + 3y + 4z + 760} E_{\min} = 1.38 \quad E_{\max} = 120$

$$u_x(x, y, z) = p \left[ \frac{A}{2} \left( x^2 + \nu(y^2 + z^2) \right) + Bxy + Cxz + Dx - \nu \frac{Ah}{4}(y + z) \right]$$

$$u_y(x, y, z) = -\nu p \left[ Axy + \frac{B}{2} \left( y^2 - z^2 \right) + \frac{x^2}{\nu} + Cyz + Dy - \frac{Ah}{4}x - \frac{Ch}{4}z \right]$$

$$u_z(x, y, z) = -\nu p \left[ Axz + Byz + \frac{C}{2} \left( z^2 - y^2 \right) + \frac{x^2}{\nu} + Dz + \frac{Ch}{4}y - \frac{Ah}{4}x \right]$$

Avec :  $A = 0.002, \quad B = 0.003, \quad C = 0.004, \quad D = 0.76$

### 2.2 Result of reference

Temperature at the point  $O$  and at the point  $D$ .

Displacement of the point  $A$ .


### 2.3 Bibliographical reference

- 1) S. ANDRIEUX "an analytical solution to a linear problem of elasticity isotropic 3D with Young modulus function of the variables of space [V4.90.01].

## 3 Modeling A

### 3.1 Characteristics of modeling

3D

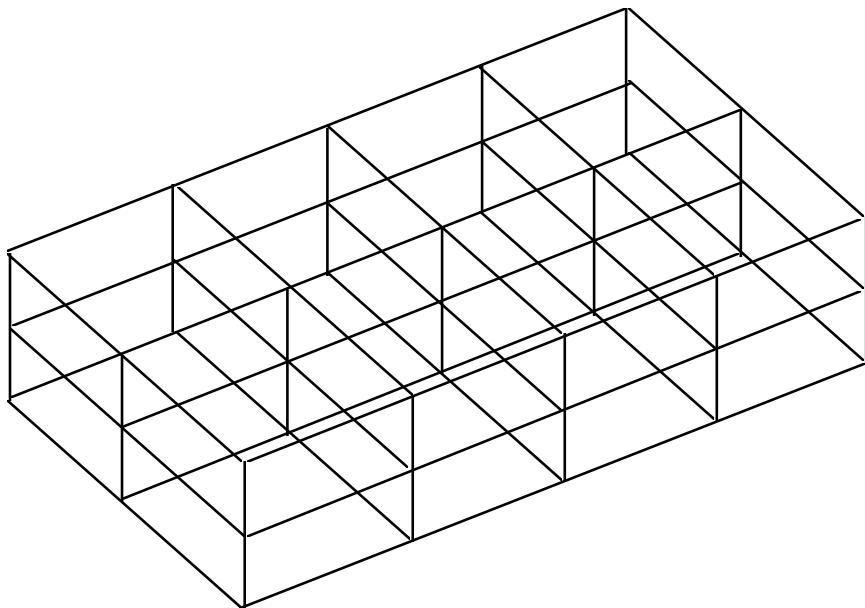

### 3.2 Characteristics of the grid

Many nodes: 141

Many meshes and types: 16 HEXA20

### 3.3 Remarks

It is necessary to envisage a large number of points of discretization of the curve  $E(T)$  to obtain the desired precision. Here 250 points were taken  $(E_i, T_i)$ .

### 3.4 Values tested

Identification	Reference
0 $T$	+40.
$D$ $T$	- 35.
$A$ $u_x$	+15.6
$u_y$	- 0.57
$u_z$	- 0.77
$D$ $u_x$	+16.3
$u_y$	- 1,785
$u_z$	- 2.0075

## **4 Summary of the results**

---

This problem requires a very fine discretization of the function  $E(T)$  to obtain the reference solution.