

Operator CALC_FONCTION

1 Goal

To carry out mathematical operations on structures of data of type function.

The operator allows to carry out general operations on the functions (integration, derivative, absolute value, combination, polynomial regression...) and of the operations dedicated to the signal processing and the earthquake (calculation of FFT, smoothing wraps, correction of accélérogrammes...).

Product a structure of data `function`, `fonction_c` or `tablecloth`, according to the keyword factor used.

At exit of the order, the function is reordered by increasing X-coordinates.

Contents

1 Goal.....	1
2 Syntax.....	5
3 Operands.....	11
3.1 Keyword DRIFT.....	11
3.2 Keyword JUST.....	11
3.3 Keyword OPPOSITE.....	12
3.4 Keyword ABS.....	12
3.5 Keyword ENVELOPE.....	12
3.5.1 Operand FUNCTION.....	12
3.5.2 Operand CRITERION.....	12
3.6 Keyword FRACTILE.....	13
3.6.1 Operand FUNCTION.....	13
3.6.2 Operand FRACT.....	13
3.7 Keyword AVERAGE.....	13
3.8 Keyword COHERENCE.....	13
3.8.1 OperandS NAPPE_1 and NAPPE_2.....	14
3.8.2 Operand FREQ_COUP.....	14
3.8.3 Operand NB_FREQ_LISS.....	14
3.8.4 OperandS OPTION, BORNE_INF and BORNE_SUP.....	15
3.9 Keyword COMB and operand LIST_PARA.....	15
3.10 Keyword COMB_C and operand LIST_PARA.....	15
3.11 Keyword MULT and operand LIST_PARA.....	16
3.12 Keyword COMPOSE.....	16
3.13 Keyword ADZE.....	16
3.13.1 Operand FUNCTION.....	16
3.13.2 Operand OVERLOAD.....	16
3.13.3 Checks.....	17
3.14 Keyword EXTRACTION.....	17
3.14.1 Operand FUNCTION.....	17
3.14.2 Operand PART.....	17
3.15 Keyword POWER.....	17
3.16 Keyword REGR_POLYNOMIALE.....	17
3.17 Keyword FFT.....	18
3.18 Keyword INTERPOL_FFT.....	19
3.19 Keyword CORR_ACCE.....	19
3.19.1 Operand FUNCTION.....	19
3.19.2 Operand METHOD.....	19
3.20 Keyword LISS_ENVELOP.....	20

3.21 Keyword SPEC_OSCI.....	21
3.21.1 Operand FUNCTION.....	22
3.21.2 Operands NATURE/NATURE_FONC.....	22
3.21.3 Operand METHOD.....	23
3.21.4 Operand TYPE_RESU.....	23
3.21.5 Operand AMOR_REDUIT.....	23
3.21.6 Operands FREQ/LIST_FREQ.....	23
3.21.7 Operand NORMALIZES.....	23
3.21.8 Operand DURATION.....	23
3.22 Keyword PROL_SPEC_OSCI.....	23
3.22.1 Operand FUNCTION.....	24
3.22.2 Operand NORMALIZES.....	24
3.22.3 Operand DEPL_MAX.....	24
3.23 Keyword DSP.....	24
3.23.1 Operand FUNCTION.....	24
3.23.2 Operands AMOR_REDUIT, LIST_FREQ, FREQ_PAS.....	25
3.23.3 Operands FREQ_COUP.....	25
3.23.4 Operand DURATION.....	25
3.23.5 Operand NORMALIZES.....	25
3.23.6 Operand FRACT.....	25
3.23.7 Operand NB_ITER.....	25
3.24 Keyword INTEGRE_FREQ.....	25
3.24.1 Operand FUNCTION.....	25
3.24.2 Operand NRIVEAU.....	26
3.24.3 Operand FREQ_COUP.....	26
3.24.4 Operand FREQ_FILTRE.....	26
3.25 Keyword DERIVE_FREQ.....	26
3.25.1 Operand FUNCTION.....	26
3.25.2 Operand NRIVEAU.....	26
3.25.3 Operand FREQ_COUP.....	26
3.26 Attributes of the concept function at exit.....	26
3.26.1 Values by default.....	26
3.26.2 Overload of the attributes.....	27
3.26.2.1 Operand NOM_PARA.....	27
3.26.2.2 Operand NOM_RESU.....	28
3.26.2.3 Operand Interpol.....	28
3.26.2.4 Operands PROL_DROITE/ PROL_GAUCHE.....	28
3.26.2.5 Operands NOM_PARA_FONC / INTERPOL_FONC / PROL_DROITE_FONC / PROL_GAUCHE_FONC.....	28
3.27 Operand INFORMATION.....	28

4 Examples.....	29
4.1 Calculation of an envelope.....	29
4.2 Calculation of the derivative of the function if.....	29
4.3 Concatenation of two functions.....	29
4.4 Composition of two functions.....	30

2 Syntax

```

Fr      = CALC_FONCTION

      (
        / DRIFT = _F (
          [function]
          / METHOD =
            'DIFF_CENTREE', [DEFECT]
          ),
        / JUST = _F (
          [function]
          / METHOD =
            'TRAPEZOID', [DEFECT]
          / 'SIMPSON',
            / COEFF
          = / 0. , [DEFECT]
            / R, [R]
          ),
        / OPPOSITE = _F (
          [function]
          ),
        / ABS = _F (
          [function]
          ),
        / ENVELOPE = _F (
          [L_function]
          / CRITERION =
            'SUP', [DEFECT]
          / 'INF',
          ),
        / FRACTILE = _F (
          [L_function]
          / FRACT =
            / 1. , [DEFECT]
          / fract [R]
          ),
        / AVERAGE = _F (
          [L_function]
          ),
        / COHERENCE = _F (
          [TABLECLOTH]
          / NAPPE_1 =
            N,
            [TABLECLOTH]
            / NAPPE_2 =
              N,
              [DEFECT]
              / NB_FREQ_LISS =
                / 12,
                / nbl , [ I
          ]
          / FREQ_COUP =
            FC [ R]

```

```

                                ◇ OPTION =
                                / 'ALL',
                                [DEFECT]
                                / `
DUREE_PHASE_FORTE ` ,
                                IF OPTION = ` DUREE_PHASE_FORTE `
                                / 0.05, [DEFECT]
                                / binf, [R]
                                / 0.95, [DEFECT]
                                / BSUP, [ R ]
                                ),
                                / COMB = _F ( ◆ FUNCTION = F,
                                [function]
                                ◆ COEFF =
                                R, [R]
                                ),
                                / COMB_C = _F ( ◆ FUNCTION =
                                [fonction_c]
                                ◆ / COEF_R
                                = R , [R]
                                / COEF_C
                                = C , [C]
                                ),
                                / MULT = _F ( ◆ FUNCTION = F,
                                [function]
                                ),
                                / REGR_POLYNOMIALE = _F ( ◆ FUNCTION =
                                [function]
                                ◆
                                DEGREE = N, [I]
                                ),
                                # if COMB or COMB_C or REGR_POLYNOMIALE
                                ◇ LIST_PARA = will lpara,
                                [listr8]
                                / COMPOSE = _F ( ◆ FONC_RESU =
                                [function]
                                ◆ FONC_PARA =
                                will f_para , [function]
                                ),
                                / ADZE = _F ( ◆ FUNCTION = l_f,
                                [l_fonction]
                                ◇ OVERLOAD =
                                / `RIGHT`, [DEFECT]
                                / `LEFT`,
                                ),

```

```

/      EXTRACTION= _F ( ♦      FUNCTION      =      f_c,
[fonction_c]
      ♦      PART      =
/      'REAL',
/      'IMAG',
/      'MODULE',
/      'PHASE',
      ),
/ POWER =      _F ( ♦      FUNCTION      =      F,
[function]
      ♦      EXHIBITOR      =
/ N,      [I]
/ 1,      [DEFECT]
      ),
/      FFT      =      _F ( ♦      FUNCTION      =
F,      [function]
      ♦      METHOD      =
/      'PROL_ZERO',      [DEFECT]
/      'TRUNCATION',
/      'COMPLETE',
      ♦      SYME      =
/      'YES',      [DEFECT]
/      'NOT',
      ), FMIN
/      CORR_ACCE = _F ( ♦      FUNCTION      =      F,
[function]
      ♦      METHOD      =
/      'FILTERING',
/      'POLYNOMIAL',
if METHOD == 'POLYNOMIAL'
      ♦      CORR_DEPL      =
/      'NOT',      [DEFECT]
/      'YES',
if METHOD == 'FILTERING'
      ♦      FREQ_FILTRE
=      / Fr
/0.05,      [DEFECT]
      ),
/      LISS_ENVELOP      = _F (
TABLECLOTH      =      N,      [tablecloth]
      ♦
/      TABLE
=      T,      [table]
/      FUNCTION      =      F,
[function]

```

```

                                ♦   OPTION           =   /   'DESIGN' ,
                                /   'CHECKING' ,
                                ◇   FREQ_MIN       =
/   fmin,                       [R]
                                ◇   FREQ_MAX       =
/   fmax,                       [R]
                                ◇   ELARG          =
/   elar,                       [1_R]
                                ◇   LIST_FREQ      =
/   listfreq,                   [1_R]
                                ◇   LIST_AMOR      =   /   listamor,
[1_R]
                                ◇   NB_FREQ_LISS
                                =   /   Nb,         [R]
                                = /   10,
[DEFECT]
                                ◇   ZPA
                                =   /   zpa,       [R]
                                ),
/   DSP =   _F (
sro,                             [function]
                                ♦   FUNCTION       =
                                ♦   AMOR_REDUIT =   lam,
                                [1_R]
                                ◇   /   FREQ_PAS   =
freq_pas,                       [R]
                                /   LIST_FREQ     =
list_freq,                      [listr8]
                                ♦   FREQ_COUP    =   frc
                                [R]
                                ♦   DURATION      =
tsm                             [R]
                                ♦   NORMALIZES   =
R,                               [R]
                                ◇   FRACT        =
/   0.5,                       [DEFECT]
/   fract                       [R]
                                ◇   NB_ITER      =
/   10,                         [DEFECT]
/   niter                       [R]
                                ),
/   SPEC_OSCI = _F ( ♦   FUNCTION       =   F,
[function]
                                ◇   METHOD        =
/ 'NIGAM',                      [DEFECT]
/ 'HARMO'
/ 'RICE'
                                ◇   TYPE_RESU =   /
'TABLECLOTH'                   [DEFECT]
'FUNCTION',

```



```

                                ◇ AMOR_REDUIT = lam,
                                ◇ /   FREQ   =
lfre,                            [L_R]
                                /   LIST_FREQ =
lfreq,                            [listr8]
                                ◇ NATURE
= / 'ACCE',                        [DEFECT]
  / 'QUICKLY',
  / 'DEPL',
= R,                                [R]
                                ◆ NORMALIZES
if METHOD == 'RICE'
    'DSP',                            [DEFECT]
                                ◇ NATURE_FONC =
    = tsm                            [R]
                                ◆ DURATION
if METHOD == 'NIGAM' or 'HARMO'
    'ACCE',                            [DEFECT]
                                ◇ NATURE_FONC =
                                ),
/   INTEGRE_FREQ = _F (
                                ◆ FUNCTION = FC , [function]
                                ◆ LEVEL   = / 1,
                                / 2,
                                ◇   FREQ_FILTER = F0 [R]
                                ◆   FREQ_COUP  = frc [R]
                                ),
/   DERIVE_FREQ = _F (
                                ◆ FUNCTION = FC , [function]
                                ◆ LEVEL   = / 1,
                                / 2,
                                ◆   FREQ_COUP  = frc [R]
                                ),
/   PROL_SPEC_OSCI = _F ( ◆ FUNCTION = F,
                                [function]
                                ◆ NORMALIZES
= R,                                [R]
                                ◆ depl_max =
dmax,                            [DEFECT]
                                ),
                                ◇ NOM_PARA = para,
                                [KN]
                                ◇ NOM_RESU = resu,
                                [K N ]
                                ◇ PROL_DROITE = / 'CONSTANT',
                                                / 'LINEAR',
                                                / 'EXCLUDED'
,
                                ◇ PROL_GAUCHE = / 'CONSTANT',
                                                / 'LINEAR',
                                                / 'EXCLUDED'

```

```

    ◇ Interpol
      [L_KN] = | 'FLAX',
              | 'LOG',
    ◇ INTERPOL_FONC
      [L_KN] = | 'FLAX',
              | 'LOG',
    ◇ NOM_PARA_FONC
      [KN] = parf,
    ◇ PROL_DROITE_FONC = / 'CONSTANT',
                        / 'LINEAR',
                        / 'EXCLUDED'
  ,
    ◇ PROL_GAUCHE_FONC = / 'CONSTANT',
                        / 'LINEAR',
                        / 'EXCLUDED'
  ,
    ◇ INFORMATION = / 1,
                    [DEFECT]
                    / 2,
)

```

```

If keyword factor COMB_C then Fr = [FONCTION_C],
if keyword factor SPEC_OSCI then Fr = [TABLECLOTH or FUNCTION]
according to values of TYPE_RESU and AMOR_REDUIT,
if keyword factor COHERENCE then Fr = [FUNCTION],
if keyword factor ENVELOPE, FRACTILE, POWER then Fr is of the same type as the functions as
starter,
for all the other keyword factors, Fr = [FUNCTION].

```

3 Operands

3.1 Keyword DRIFT

/ DRIFT =

The function is derived $f(t)$.

◆ FUNCTION = F

Name of the function which one wishes to derive.

Does not apply to the concepts of the type `tablecloth`.

◇ METHOD =

Name of METHOD that one wishes to use : the only method available is currently `DIFF_CENTREE` (by default).

Remarks :

| See keyword *JUST*.

3.2 Keyword JUST

/ INTEGRATE =

The function is integrated $f(t)$.

◇ COEFF = r

Constant of integration, by default 0.

◆ FUNCTION = F

Name of the function which one wishes to integrate.

Does not apply to the concepts of the type `tablecloth`.

◇ METHOD =

Name of METHOD that one wishes to use.

Two methods are available: method of `'TRAPEZOID'` (by default) and method of `'SIMPSON'`.

The integral is exact for the linear functions per pieces as provided as starter. The mistake made compared to the integral of the function which one discretized is in $o(1/n^2)$ for functions of classes C^2 .

The method of Simpson is exact for the polynomials of degree lower or equal to 3. The error is in $o(1/n^4)$ for functions of classes C^4 .

For the unspecified functions, very kicked up a rumpus, like the accélérogrammes, it is advised to use the method of the trapezoids.

On the other hand, when the function $f(t)$ (before discretization) is sufficiently regular, the method of Simpson is much more precise.

Remarks :

1) For *JUST* as for *DRIFT*, it *NOM_PARA* produced function is unchanged. On the other hand, it *NOM_RESU* can be modified in the following cases: for derivation, *DEPL* becomes *QUICKLY*, *QUICKLY* becomes *ACCE* ; for integration, *ACCE* becomes *QUICKLY*, *QUICKLY* becomes *DEPL*. The user always has the possibility of modifying it by the keyword of the same name in *CALC_FONCTION*.

- 2) Concerning the prolongations, the produced function has, by default of the prolongations *EXCLUDED* on the left and on the right some are those of the starting function. Not to thus expect that a linear prolongation becomes constant in the derived function... There still, the user is Master of his prolongations for the function produced by the keywords *PROL_DROITE* and *PROL_GAUCHE*.

3.3 Keyword **OPPOSITE**

/ OPPOSITE =

The function is reversed $f(t)$.

◆ FUNCTION = F

Name of the function which one wishes to reverse, it is necessary that this one is bijective (strictly increasing or strictly decreasing).

Does not apply to the concepts of the type `tablecloth`.

Notice :

- 1) The labels of the parameters are not reversed! The care is left to the user affect the correct values by the keywords *NOM_PARA* and *NOM_RESU*. By default, it *NOM_PARA* is unchanged and *NOM_RESU* is affected with 'TOUTRESU'.
- 2) The modes of interpolations are inverted: e.g. ('FLAX' , 'LOG') becomes ('LOG' , 'FLAX').
- 3) Prolongations *EXCLUDED* and *LINEAR* are unchanged. On the other hand, a prolongation *CONSTANT* is changed into *EXCLUDED*.

3.4 Keyword **ABS**

/ ABS =

Provides the absolute value of a function or a tablecloth.

◆ FUNCTION = F

Name of the function which one wishes the absolute value.

Notice :

- 1) The parameters (prolongations, interpolations, *NOM_PARA* and *NOM_RESU*) produced function are the same ones as those of the starting function.
- 2) Except for the prolongation *LINEAR*: systematically changed into *EXCLUDED* by precaution. Indeed, the linear prolongation on the right of a decreasing function leads for sufficiently large X-coordinates to negative values: responsibility is thus left to the user affect itself *PROL_DROITE*= ' LINEAIRE ' (and respectively on the left).

3.5 Keyword **ENVELOPE**

/ ENVELOPE =

Calculation of the envelope of several functions.

This operation is available on operands of nature `function` or `tablecloth`.

3.5.1 Operand **FUNCTION**

◆ FUNCTION = F

List of the functions or tablecloths which one seeks the envelope.

3.5.2 Operand **CRITERION**

◇ CRITERION =
/ 'SUP'
The higher envelope is sought.
/ 'INF'
The lower envelope is sought.

Remarks for the research of the envelope:

- *the functions all must be of comparable nature (function or tablecloth),*
- *Case of the simple functions: for the prolongations, interpolations, NOM_PARA and NOM_RESU, they are the parameters of the first of the functions in the list which are retained. The support of X-coordinates of the function envelope will be the meeting of the lists of X-coordinates of all the functions.*
- *Case of the tablecloths: the parameters (prolongations, interpolations, NOM_PARA, NOM_RESU, NOM_PARA_FONC) must imperatively be identical between the provided tablecloths. The supports of X-coordinates (values of the parameters and X-coordinates of the functions of the tablecloths) are homogenized to be able to calculate the envelope. The produced tablecloth will have this discretization for X-coordinates.*

3.6 Keyword FRACTILE

/ FRACTILE =
Calculation of the fractile several functions.
This operation is available on operands of nature `function` or `tablecloth`.

3.6.1 Operand FUNCTION

◆ FUNCTION = F
List of the functions or tablecloths which one seeks to calculate the fractile.

3.6.2 Operand FRACT

◆ FRACT = `fract`
Value of the quantile to be calculated. By default `fract` = 1, the fractile is then the higher envelope.

3.7 Keyword AVERAGE

/ AVERAGE =
Calculation of the average of several functions.
This operation is available on operands of nature `function` or `tablecloth`.

3.8 Keyword COHERENCE

/ COHERENCE =
Calculation of function of coherence of temporal signals.
The function of coherence depends on the distance between two points of measurement and on the frequency. It expresses the correlation between the two signals, measured at a distance d , according to the frequency. The function of coherence complex is evaluated in frequential field, via the spectral concentrations (DSP). The operator returns the real part of

complex coherence, which corresponds to “*unlagged coherency*” or it “*plane wave coherency*” in the case of a plane wave.

The temporal signals must have the same discretization (even not time dt and even lasted T). The user must provide two tablecloths which contain the signals respectively with X stations 1 and 2, outdistanced S of d . The signals in each tablecloth are parameterized by `NUME_ORDRE` (1,2,3..) and then paired to calculate coherences and to take the average of it.

3.8.1 Operands `NAPPE_1` and `NAPPE_2`

◆ `NAPPE_1 = nappel`

Tablecloth containing NR functions measured at station 1. The functions of the tablecloth must be numbered of 1 to NR by `NOM_PARA = 'NUMÉRIQUE_ORDRE'`.

◆ `NAPPE_2 = nappe2`

Tablecloth containing NR functions measured at station 2. The functions of the tablecloth must be numbered of 1 to NR by `NOM_PARA = 'NUMÉRIQUE_ORDRE'`.

3.8.2 Operand `FREQ_COUP`


◇ `FREQ_COUP = FC`

Cut-off frequency for the tracing of the functions of coherence. cut-off frequency must to be lower than $\frac{1}{2 \times dt}$, where dt is the step of time of the temporal signals. For the evaluation of the functions of coherence, the cut-off frequency is always determined by the step of time of the temporal signals. If `FREQ_COUP` is informed, then the function of coherence is crossed with fc before restitution.

3.8.3 Operand `NB_FREQ_LISS`

◇ `NB_FREQ_LISS = / 12 [defect]`
`/ nfl`

Many steps of frequency used for the smoothing of the DSP by window the Hamming one. The window the Hamming one obtained with `NB_FREQ_LISS = 12` is shown in the figure below.

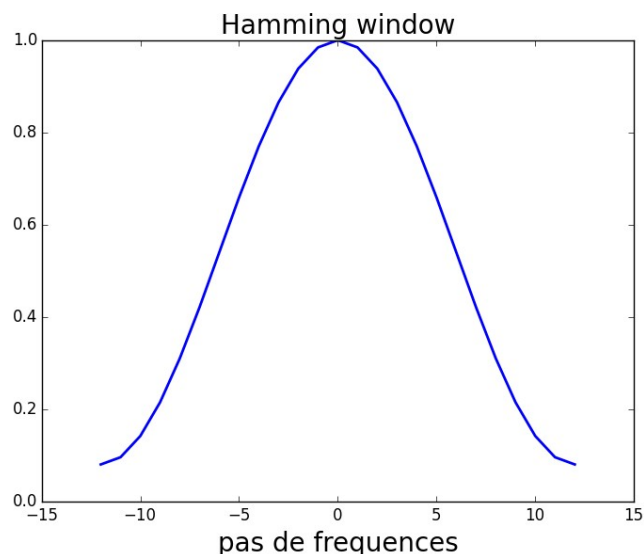

3.8.4 OperandS OPTION, BORNE_INF and BORNE_SUP

◇ / OPTION =

Allows to determine whether the whole signal or only the strong phase is used for the calculation of the function of coherence :

/ 'ALL' [DEFECT]

One uses the temporal signals such as they are.

/ 'DUREE_PHASE_FORTE'

One only evaluates the function of coherence for the duration of strong phase. The moments of beginning and end of strong phase are calculated for the first signal only. One uses then the same time interval for the other signals. In the case of the earthquake, that supposes that all the recordings come from the same event. To evaluate the duration of strong phase, one uses the notion of the intensity of Arias. The limits should then be informed lower and higher (cf. [U4.32.05]).

◇ BORNE_INF = /0.05
/binf,
◇ BORNE_SUP = /0.95
/bsup,

Terminals limiting the share of intensity Arias defining them Instants Initial and final of the strong phase (enters $(b_{inf})\%$ and $(b_{sup})\%$ of intensity of Arias) earthquake - even significance that for INFO_FONCTION. By default, one takes 5% and 95%.

3.9 Keyword COMB and operand LIST_PARA

/ COMB =

Real linear combination several concepts of nature `function` or `tablecloth`.

◆ FUNCTION = F

Name of the function to be combined.

◆ COEFF = R

Value of the coefficient.

◇ LIST_PARA = will lpara

List of the values of the parameters for which the combination of the functions will be discretized. If this keyword is not indicated, a list by default is built by taking the union of the lists of the values of the parameters of each function.

Caution:

| *It is not a keyword of the keyword factor COMB.*

Remarks for the combination:

| *See the remarks for the keyword ENVELOPE*

3.10 Keyword COMB_C and operand LIST_PARA

/ COMB_C =

Linear combination complexes several concepts of nature `function_c`.

◆ FUNCTION = f_c

Name of the function to be combined. It can be with complex or real values.

```
/      COEF_R = R,  
/      COEF_C = C,
```

Value of the multiplying coefficient, is in real form R , that is to say in complex form C .

◇ LIST_PARA = will lpara

List of the values of the parameters for which the combination of functions will be discretized. If this keyword is not indicated, a list by default is built by taking the union of the lists of the values of the parameters of each function.

Remarks for the combination:

| See the remarks for the keyword *ENVELOPE*

3.11 Keyword **MULT** and operand **LIST_PARA**

```
/      MULT
```

Product of concepts of comparable nature *function*, *fonction_c* or *tablecloth*.

◆ FUNCTION = F

Name of the function to be multiplied with the others.

LIST_PARA allows to discretize the function result as for *COMB*.

3.12 Keyword **COMPOSE**

Keyword factor allowing to calculate the made up one of two functions $F(G(t))$.

Does not apply to the concepts of the type *tablecloth*.

```
/      COMPOSE =
```

```
      ◆      FONC_RESU = f_resu
```

Function *f_resu* (X)

```
      ◆      FONC_PARA = will f_para
```

Function *will f_para* (T)

It is checked that it *NOM_PARA* of *f_resu* corresponds to *NOM_RESU* of *will f_para*.

3.13 Keyword **ADZE**

```
/      ADZE =
```

Keyword factor allowing to create a real function by concaténant two tabulées real functions.

Does not apply to the concepts of the type *tablecloth*.

3.13.1 Operand **FUNCTION**

◆ FUNCTION = l_f

Functions with concaténer. Two functions exactly are expected.

3.13.2 Operand **OVERLOAD**

```
◇      OVERLOAD = /      'RIGHT',  
                        /      'LEFT',
```

The points of discretization of the function created are those of the whole of the two functions, modulo the effects of overload.

If the fields of definition of the functions overlap, one of the functions imposes its points on the zone of covering and for the prolongations :

OVERLOAD =/ 'RIGHT' : it is the function which has largest x_{\max} who is chosen,
OVERLOAD =/ 'LEFT' : it is the function which has smallest x_{\min} who is selected.

3.13.3 Checks

It is checked that all the functions have the same one `NOM_PARA`, as well as the same interpolations.

3.14 Keyword **EXTRACTION**

/ EXTRACTION =

Keyword factor making it possible to build starting from a function complexes (standard `fonct_c`), a real function representative either the real part, or the imaginary part, or the module, or the phase of the complex function.

3.14.1 Operand **FUNCTION**

◆ FUNCTION = `f_c`

Complex function.

3.14.2 Operand **PART**

◆ PART =

/ 'REAL' : extraction of the real part of `f_c`,

/ 'IMAG' : extraction of the imaginary part of `f_c`,

/ 'MODUL' : extraction of the module of `f_c`,

E'

/ 'PHASE' : extraction of the phase (in degree) of `f_c`.

,

3.15 Keyword **POWER**

This keyword makes it possible to build power $N^{\text{ème}}$ of a function or a set of functions provided in the form of a tablecloth.

◆ FUNCTION = `F`

Name of the function `F` concerned (standard function or tablecloth).

◆ EXHIBITOR = `N`

The function result calculated will be $x \rightarrow f(x)^n$. By default, $n=1$.

3.16 Keyword **REGR_POLYNOMIALE**

This keyword calculates the polynomial regression of a function by the method of least squares (by using the function `polyfit` of `numpy`).

◆ FUNCTION = `F`

Name of the function `F` concerned (standard function).

◆ DEGREE = `N`

Degree of the required polynomial.

One can use the keyword `LIST_PARA` for tabuler the calculated polynomial. If not, it is tabulé on the list of the X-coordinates of the function `F`.

3.17 Keyword FFT

/ FFT =

One calculates the transform of Fourier direct or opposite of a function (of which by algorithm FFT).

◆ FUNCTION = F

Name of the function on which the operation is carried out.

If it NOM_PARA function is INST, then FFT direct is calculated.

If it NOM_PARA function is FREQ, then FFT opposite is calculated.

Does not apply to the concepts of the type tablecloth.

◆ METHOD =

Algorithm FFT is faster for the samples of which the length is a power of 2.

Method 'PROL_ZERO' (by default) proposes to prolong the entry signal with zeros until having a full number of sample which is the first power of 2 whose value is higher than the initial number of samples.

Method 'TRUNCATION' will consider only the first samples of which the full number is more the great power of two whose value is lower than the initial number of sample.

For example, on a signal of 601 values, the method 'PROL_ZERO' will supplement the signal to have 1024 samples, whereas the method 'TRUNCATION' will consider only the first 512 moments.

If the entry signal has a number of sample which is a power of two, the two methods are obviously equivalent: one takes into account the signal without modifying it.

Method 'COMPLETE' allows to take into account the totality of the entry signal, some is the number of samples.

Nota bene: in the case of a sample length N , of which the step of time would be dt , the sampling rate of the FFT is $1/(N \cdot dt)$. On the other hand, the last frequency for which the discrete transform is calculated is not $1/dt$, but $(N-1)/(N \cdot dt)$.

◆ SYME =

Keyword which applies only for the opposite transform of Fourier.

If the complete spectrum would be provided, then the opposite transform is calculated directly while using SYME = 'YES'. Methods 'TRONCATURE' and 'PROL_ZERO' are then not active.

If the spectrum (complex) provided as starter of the opposite FFT does not contain the folded up part (partners at the negative frequencies of the spectrum), one can nevertheless consider a signal temporal having the same spectral contents on the part associated with the positive frequencies. If one notes X_k k ième sample of the transform of Fourier of a sample length N ,

then one has $X_k = X_{(N-k)}^*$, where $()^*$ corresponds to the combined complex. This information can be exploited to rebuild a temporal signal by knowing only half of the spectrum. This operation is carried out when one chooses SYME = 'NOT'. The temporal signal is then rebuilt to obtain a temporal sample even length. In theory, to rebuild a temporal signal length $2 \times M$, the spectrum must check certain conditions:

1. The spectrum must be length $M + 1$,
2. The first point of the spectrum must be real,
3. The last point of the spectrum must be real.

If these conditions are not checked, then one builds an approximate spectrum odd length checking these conditions. If the initial spectrum is even length, the last point is then rebuilt by carrying out a prolongation by interpolation of the initial spectrum. This reconstruction can introduce a light skew when the spectral contents of the sample are very significant on the last points of the spectrum.

Methods 'TRONCATURE' and 'PROL_ZERO' are still available for the opposite FFT. Attention, however, with the use of the method 'TRONCATURE'. If the number of truncated point is significant, then the results can be very appreciably different.

3.18 Keyword INTERPOL_FFT

```
/ INTERPOL_FFT =
```

Interpolation of a accélérogramme by method "zero padding". This method consists in calculating the transform of Fourier of the initial signal, to supplement the frequential signal obtained by newsS frequencies of zero value then with calculationner the transform of Fourier reverses of this modified frequential signal. This functionality uses the same algorithms as the keyword FFT. The method is necessarily 'COMPLETE' and SYME = 'NOT'.

It makes it possible not to add of frequential contents the interpolated function.

◆ FUNCTION = F

Name of the function on which the operation is carried out.

NOM_PARA function is necessarily INST.

◆ PAS_INST =

Increment of time desired for the interpolated signal. Must be smaller than the increment of time provided function.

```
◇ PRECISION =  
  / prec  
  / 0.01 [DEFECT]
```

The step of time really obtained is often slightly different that indicated via PAS_INST. This operand defines the maximum change desired between these two values, if it is exceeded, a message of alarm is emitted to inform the user.

3.19 Keyword CORR_ACCE

```
/ CORR_ACCE =
```

Keyword factor allowing to correct a accélérogramme (seismic signal in acceleration) so that the signal in displacement does not have drift. One turns over at exit the corrected accélérogramme. The signal can then be integrated by the methods standards (keyword JUST of CALC_FONCTION). It is advisable to check the quality of the result by checking the absence of drift of the signal in displacement and comparing the spectra of answer before and after modification.

3.19.1 Operand FUNCTION

◆ FUNCTION = F

Measured real Accélérogramme.

Does not apply to the concepts of the type tablecloth.

3.19.2 Operand METHOD

◆ METHOD =

Name of METHOD that one wishes to use to correct the signals: correction by POLYNOMIALS or by FILTERING in the frequential field.

```
METHODE=' POLYNOME'
```

One removes the drift of the signal, calculated by linear smoothing within the meaning of least squares on the totality of the signal. The drift corresponding relative speed is also removed.

```
◇ CORR_DEPL =  
  / 'NOT'
```

One does not correct the drift of relative displacement, it is the value by default.

```
/ 'YES'
```

One removes also the drift of relative displacement. This option is to be used with precaution, because one does not know a priori the value of final displacement after the earthquake.

```
METHODE=' FILTRAGE'
```

One removes the drift by filtering ("passe_haut") signal in the field of the frequencies. This filter is described in R4.05.05 documentation (section 2.1).

```
◇   FREQ_FILTRE =  
    /   Fr  
    /   0.05 [DEFECT]
```

It is necessary to choose the smallest frequency which makes it possible to obtain the discounted effect, namely to remove the drift, without (too much) deteriorating the other properties of the signal. By default, the frequency of the filter is worth 0.05Hz. This value is generally well adapted for the seismic signals. This value can be decreased if the signal allows it or increased if a drift persists.

3.20 Keyword LISS_ENVELOP

```
◆   / TABLECLOTH = N
```

Name of the tablecloth or the tablecloths of formed entry(S) rough spectra associated with each level of damping. The tablecloth thus depends on the parameters frequency and damping.

```
/ TABLE =
```

Name of the table or the tables of entry formedE (S) rough spectra associated with each level of damping. In the expected format, the first column contains the values of the frequencies, each following column contains the value of acceleration associated with the frequency for a level with damping given. The values of depreciation are given by LIST_AMOR.

```
/ FUNCTION = N
```

Name of the formed function DU spectrum associated gross with a level of damping.

```
◆   OPTION =  
    / 'DESIGN'
```

The first stage consists in building an envelope on the provided spectra. In one second stage, one carries out the smoothing of the spectrum obtained according to the number of smoothed points asked NB_FREQ_LISS .

```
/ 'VERIFICATION'
```

The first stage consists in carrying out a smoothing of each provided spectrum according to the number of points asked. Then, one carries out a widening of each spectrum following the provided coefficients dan S ELARG . In a third stage, the envelope of the widened spectra is calculated . Finally the last stage realizes the smoothing of the spectrum obtained according to the number of smoothed points asked.

```
◇   NB_FREQ_LISS
```

Many frequencies desired for the smoothed spectrum. In the case of the option 'DESIGN', only one value is provided. For the option 'CHECKING', one can provide two values which will be applied at the first stage and to fourth stage.

```
◇   FREQ_MIN and FREQ_MAX
```

Beach of definition in frequency of the smoothed spectrum.

Frequencies mentioned under FREQ_MIN and FREQ_MAX must be selected among frequencies of discretization of the rough spectrum.

By default, one considers the complete spectrum.

```
◇   ELARG
```

Widening relates to the whole of a spectrum. One must provide values as many as of many tablecloths or tables.

For each frequency F_i rough spectrum, one defines two new values of frequencies such as:

- $F^- = F_i(1 - \tau_g)$ with $0 < \tau_g < 1$;
- $F^+ = F_i(1 + \tau_d)$ with $0 < \tau_d < 1$.

Parameters τ_g and τ_d represent the amplitude of widening in frequency and equal to the value are providedE.

Values of the offset frequencies F^- and F^+ do not correspond to the values F_i list of definition of the rough spectrum. One defines thus F_j and F_k such as:

- F_j : value belonging to the list, immediately below or equalizes with F^- ,
- F_k : value belonging to the list, immediately below or equalizes with F^+ .

For each frequency F_i , two points of coordinates (F_j, γ_i) and (F_k, γ_i) are defined, where γ_i represent acceleration at the frequency F_i . Two new spectra resulting from the shift of the rough spectrum on the axis of the frequencies are thus built. Then the envelope is calculated.

◇ LIST_FREQ

List of frequencies which one wishes to preserve for the smoothed spectrum. The elements of this list must be contained in the values of frequency of the spectra taken as starter.

◇ LIST_AMOR

List of depreciation which one wishes to associate with the various values of accelerations of provided table.

◇ ZPA

Value of the high frequency acceleration which one wishes to impose for the smoothed spectrum. By default, it acts of the value of the spectrum less deadened at the highest frequency.

An example of application is proposed in the case test ZZZZ100E.

3.21 Keyword SPEC_OSCI

/ SPEC_OSCI =

When METHOD = 'NIGAM' (defect) or 'HARMO' (cf. §3.21.1), NATURE_FONC = 'ACCE' (cf. §3.21.2), one Calculate the spectrum of oscillator of a accélérogramme [R4.05.03] given under the keyword FUNCTION (cf. §3.21.1).

The spectrum of oscillator is calculable only on the functions of NOM_RESU = 'ACCE' and of NOM_PARA = 'INST'.

For all i and all j one considers q_j^i the solution of the differential equation:

$$\ddot{q}_j^i + 2\xi_j \omega_i \dot{q}_j^i + \omega_i^2 q_j^i = f(t)$$

$$\text{with } q_j^i(0) = \dot{q}_j^i(0) = f(0) \text{ and } \omega_i = 2\pi\phi_i$$

The produced concept fr is a tablecloth (function with two variables) made up by the functions $(fr_i, \dots, fr_j, \dots)$ with fr_j function defined in the points ω_i with:

$$fr_j(\omega_i) = \text{Max}_{t \in D} |q_i^j(t)| \quad \text{and} \quad D = \{t / f \text{ définie}\}$$

By default for the calculation of the spectrum of oscillator

- one considers for reduced depreciation the values:

0.02 0.05 0.10

- one considers for the frequencies, the 150 values following in *Hz*,
first is with *0.2 Hz* and one deduces the following ones by the rule;
2nd with 57ème : by step of 0.05 Hz

	58	65
0,075 Hz	66	79
0.10 Hz	80	103
0,125 Hz	104	131
0.25 Hz	132	137
0.5 Hz	138	141
1. Hz	142	150
1.5 Hz		

The cut-off frequency by default is thus *35,5 Hz* (the user must check that this value is coherent with the frequential contents of the entry signal; if it is not the case, it is necessary to define a list of adapted frequency).

- the spectrum is normalized according to the value of `NORMALIZES`.

When `METHOD = 'RICE'` (cf. §3.21.1), `NATURE_FONC = 'DSP'` (cf. §3.21.2), `L` is calculated. E spectrum of oscillator are equivalent to a spectral concentration of power (DSP) [R4.05.03] under the keyword `FUNCTION` (cf. §3.21.1). The function must be of `NOM_PARA = 'FREQ'`.

3.21.1 Operand `FUNCTION`

◆ `FUNCTION = F`

Name of the function on which the operation is carried out.
Does not apply to the concepts of the type `tablecloth`.

3.21.2 Operands `NATURE/NATURE_FONC`

◇ `NATURE =`

Nature of the size of the `tablecloth` created by the order `CALC_FONCTION`.

ACCE	Spectrum of pseudo-acceleration absolute	$\ddot{u}(t) = \omega_i^2 u(t)$
QUICKLY	Spectrum of pseudonymrelative speed	$\dot{u}(t) = \omega_i u(t)$
DEPL	Spectrum of relative displacement	$u(t)$

◇ `NATURE_FONC =` / `'ACCE'`
/ `'DSP'`

Nature of the function which is used to build the spectrum. The choice is imposed according to the selected method: `'ACCE'` (temporal signal) or `'DSP'` (spectral concentration of power)

in acceleration). This keyword makes it possible to overload it NOM_RESU function specified under the keyword FUNCTION when this one is created by RECU_FONCTION [U4.32.03].

3.21.3 Operand METHOD

◇ METHOD =

Name of METHOD that one wishes to use : the method by default, 'NIGAM', is detailed in the document [R5.05.01]. If the method is chosen 'HARMO', then the spectrum of answer is obtained by successive harmonic calculations (for various Eigen frequencies of oscillator) via a FFT/IFFT of the signal as starter. If one chooses 'RICE' then one determines the SRO are equivalent for the data of a DSP.

3.21.4 Operand TYPE_RESU

◇ TYPE_RESU = / 'TABLECLOTH' [DEFECT]
/ 'FUNCTION'

By default, the use of SPEC_OSCI product a tablecloth. If AMOR_REDUIT contains only one damping, one creates a tablecloth containing only one function. In this case, one can choose TYPE_RESU='FONCTION' to turn over this function directly.

3.21.5 Operand AMOR_REDUIT

◇ AMOR_REDUIT = lam

$$\text{lam} = (\xi_1, \dots, \xi_i, \dots)$$

List of reduced depreciation : example 0.01,0.05,...

3.21.6 Operands FREQ/LIST_FREQ

~ ◇ FREQ = lfre

$$\text{lfre} = (\phi_1, \dots, \phi_i, \dots) . \text{List of the frequencies.}$$

~ ◇ LIST_FREQ = lfreq

List of the frequencies provided under a concept listr8.

The frequencies must be strictly positive.

3.21.7 Operand NORMALIZES

◆ = R NORMALIZES

The spectrum of oscillator will be normalized with the value R (value of pseudo-acceleration), this value is recalled in the file of message.

3.21.8 Operand DURATION

◆ DURATION = tsm

This keyword is to be informed only if METHODE=' RICE ' and thus NATURE_FONC=' DSP '. It is the duration of the strong phase of the earthquake. The seismic signal is regarded as stationary over this duration. This value is necessary to evaluate the factor of peak which intervenes in the formula of Vanmarcke to find the SRO equivalent to the data of the DSP.

3.22 Keyword PROL_SPEC_OSCI

/ SPEC_OSCI = _F (

This keyword allows to prolong one spectrum below the frequency of definition (for example $f_{min} = 0.25\text{Hz}$) by giving like criterion a value of maximum displacement d_{max} .

One calculates the slope starting from the first two values of the spectrum (the smallest frequency f_{min} is higher than zero) and ON prolongs the spectrum in displacement by retaining this slope up to the value d_{max} .

3.22.1 Operand FUNCTION

◆ `FUNCTION = F`

Name of the function on which the operation is carried out. Does not apply to the concepts of the type `tablecloth`.

3.22.2 Operand NORMALIZES

◆ `= R NORMALIZES`

The spectrum of oscillator will be normalized with the value R (value of pseudo-acceleration), this value is recalled in the file of message.

3.22.3 Operand DEPL_MAX

◆ `DEPL_MAX = dmax`

Value of displacement used to prolong the spectrum.

If the slope of the spectrum is lower than zero, it is necessary that d_{max} that is to say larger than the first value of displacement of the spectrum given.

3.23 Keyword DSP

/ `DSP =`

Calculate the spectral concentration of power (DSP) equivalent to the data of a spectrum of answer of oscillator (SRO) with the formula of Vanmarcke, function of nature `function` [R4.05.03].

The spectrum of oscillator is calculable only on the functions of `NOM_PARA = 'FREQ'`.

For the calculation of the DSP starting from a spectrum of oscillator, one considers that

- the SRO expresses the median maximum (fractile 0.5), if not it is necessary to inform another value via the keyword `FRACT`.
- the DSP is worth zero for frequencies lower or equal to $1/2\pi\text{Hz}$.
- the spectrum is normalized according to the value of `NORMALIZES`.

The user must check that the frequential discretization (list of the frequencies) is sufficient compared to the frequential contents of the signals to be modelled. It is also advisable to check equivalence between the DSP and the SRO given by making pullings or by determining values of maximum answer of an oscillator with `POST_DYNA_ALEA`. The operator calculates the spectral concentration of power (DSP) equivalent to the data of a spectrum of answer of oscillator (SRO) with the formula of Vanmarcke. One does not carry out an iteration to optimize did it.

An example of application is proposed in the case test `ZZZZ100D`.

3.23.1 Operand FUNCTION

◆ `FUNCTION = sro`

Name of the function defining the SRO.

3.23.2 Operands AMOR_REDUIT, LIST_FREQ, FREQ_PAS

The keyword AMOR_REDUIT and LIST_FREQ are identical to those described for SPEC_OSCI (cf. 3.21).

The keyword FREQ_PAS indicate the step of frequency if LIST_FREQ is not well informed.

3.23.3 Operands FREQ_COUP

◇ FREQ_COUP = frc

The cut-off frequency: one determines the DSP until this frequency. The SRO is prolonged (constant value corresponding to the ZPA) up to this value so necessary.

3.23.4 Operand DURATION

◆ DURATION = tsm

Duration of the strong phase of the earthquake. The seismic signal is regarded as stationary over this duration. This value is necessary to evaluate the factor of peak which intervenes in the formula of Vanmarcke.

3.23.5 Operand NORMALIZES

◆ = R NORMALIZES

One considers spectra of oscillator normalized with the value R (value of pseudo-acceleration). In general, the SRO are given in G, it is thus necessary to inform NORMALIZES = 9.81.

3.23.6 Operand FRACT

◇ FRACT = 0.5 [DEFECT]
fract

The DSP is adjusted on a fractile of the spectrum of answer. The value of the fractile has an impact on the determination of the factor of peak, used for in the formula of Vanmarcke. In general one considers that the target spectrum corresponds to the median and thus fract = 0.5.

3.23.7 Operand NB_ITER

◇ NB_ITER = / 10 [DEFECT]
/ niter

NRshade of iterationS to improve the adjustment of the DSP. It can be necessary to realize less iterations so to avoid itoverfitting of the DSP (two iterations for example).

3.24 Keyword INTEGRE_FREQ

/ INTEGRE_FREQ = _F (

This keyword allows the simple or double frequential integration of a function of time by using a frequential filter given high by a cut-off frequency or low given by a frequency of filtering.

3.24.1 Operand FUNCTION

◆ FUNCTION = F

Name of the function on which the operation is carried out. Does not apply to the concepts of the type tablecloth.

3.24.2 Operand NRIVEAU

◆ NRIVEAU = N

Give the level of simple integration (=1) or double (=2).

3.24.3 Operand FREQ_COUP

◆ FREQ_COUP = frc

The cut-off frequency give the level of high filtering of the signal.

3.24.4 Operand FREQ_FILTRE

◇ FREQ_FILTRE = f0

Frequency of low filtering of the signal. The value by default is 0.

3.25 Keyword DERIVE_FREQ

/ DERIVE_FREQ = _F (

This keyword allows the simple or double frequential derivation of a function of time by using a frequential filter given high by a cut-off frequency.

3.25.1 Operand FUNCTION

◆ FUNCTION = F

Name of the function on which the operation is carried out. Does not apply to the concepts of the type `tablecloth`.

3.25.2 Operand NRIVEAU

◆ NRIVEAU = N

Give the level of simple derivation (=1) or double (=2).

3.25.3 Operand FREQ_COUP

◇ FREQ_COUP = frc

The cut-off frequency give the level of high filtering of the signal.

3.26 Attributes of the concept function at exit

3.26.1 Values by default

By default attributes of the concept function at exit of the order `CALC_FONCTION` are for the various options (cf orders `DEFI_FONCTION` [U4.31.02] and `DEFI_NAPPE` [U4.31.03]).

- Option `DRIFT` :

Interpolation : data by the function as starter

Left prolongation: EXCLUDED

Right prolongation: EXCLUDED

`NOM_PARWITH` = 'INST' (example) given by the function as starter

`NOM_REKNOWN` = 'QUICKLY' (example) given by the function as starter

- Option `JUST` :

Even rules that for DRIFT

- Options COMB / COMB_C :

Attributes of the first combined function.

- Option SPEC_OSCI : the result is a tablecloth except if TYPE_RESU=' FONCTION' and that there is only one value of reduced damping.

Attributes of the tablecloth:

NAME_PARA = 'AMOR'

NOM_RESU = 'DEPL' or 'QUICKLY' or 'ACCE'

Interpolation: 'LOG'

Left prolongation: 'EXCLUDED'

Right prolongation: 'EXCLUDED'

Attributes of each function:

NOM_PARA = 'FREQ'

Interpolation : 'LOG'

Left prolongation: 'EXCLUDED'

Right prolongation: 'CONSTANT'

- Option ENVELOPE :

Attributes of the first function given.

- Option FFT :

NOM_PARA = FREQ if NOM_PARA function is INST
If not it is the reverse

- Option COMPOSE :

NOM_PARA : that of the function FONC_PARA

NOM_RESU : that of the function FONC_RESU

Interpol : that of the function FONC_RESU

Prolongation: that of the function FONC_RESU

- Option EXTRACTION :

Attributes identical to those of the function given as starter

- Option ADZE :

NOM_PARA : that of the functions

NOM_RESU : that of the functions

Interpol : linear

Prolongation: 'EXCLUDED'

3.26.2 Overload of the attributes

The user can overload the attributes given by default by using the following keywords:

3.26.2.1 Operand NOM_PARA

◇ NOM_PARA = para

It indicates the name of the parameter (variable or X-coordinate) of the function or the tablecloth. Values currently authorized for para are:

/	'EPSI'	/	'TEMP'	/	'INST'
/	'Z'	/	'X'	/	'Y'

```
          /      'FREQ'          /      'SWEATERS'  
      /      'AMOR'          /      'DY'          /  
'DZ'          /      'DX'          /  
          /      'DRX'          /      'DRY MARTINI'  
          /      'DRZ'          /  
          /      'ABSC'
```

3.26.2.2 Operand NOM_RESU

◇ NOM_RESU = resu

It makes it possible to document, the function created by giving a name (8 characters) to the function. Except exception (cf [§3.1], [§3.2], [§3.5]), this name is not tested.

3.26.2.3 Operand Interpol

◇ Interpol

When the produced concept is a tablecloth, `Interpol` defines the type of interpolation between two consecutive values of the parameter of the tablecloth and between two functions (once those evaluated). Even direction that in `DEFI_NAPPE`.

When the produced concept is a function (real or complex), it defines the type of interpolation for the X-coordinates and the ordinates of the function. One waits up to two values. If it only one value is provided, it is used for the X-coordinates and the ordinates. Even direction that in `DEFI_FONCTION`.

3.26.2.4 Operands PROL_DROITE/ PROL_GAUCHE

◇ PROL_DROITE and PROL_GAUCHE

They define the type of prolongation on the right (respectively on the left) of the field of definition of the variable:

- 'CONSTANT' for a prolongation with the last (or the first) value of the function,
- 'LINEAR' for a prolongation along the first definite segment (`PROL_GAUCHE`) or of the last definite segment (`PROL_DROITE`),
- 'EXCLUDED' if the extrapolation of the values apart from the field of definition of the parameter is prohibited.

3.26.2.5 Operands NOM_PARA_FONC / INTERPOL_FONC / PROL_DROITE_FONC / PROL_GAUCHE_FONC

These keywords make it possible to modify the attributes of the tablecloth and apply to the parameters of the functions of this one. They have the same meaning as the keywords without the suffix `FONC`.

- `NOM_PARA_FONC` is the name of the parameter of the functions (as in `DEFI_NAPPE`).
- `INTERPOL_FONC` is the type of interpolation for the X-coordinates and ordinates of the functions of the tablecloth (identical to the keyword `Interpol` keyword factor `DEFI_FONCTION` of `DEFI_NAPPE`).
- `PROL_GAUCHE_FONC/PROL_DROITE_FONC` the prolongations of the functions (identical to the keywords `define PROL_GAUCHE/PROL_DROITE` keyword factor `DEFI_FONCTION` of `DEFI_NAPPE`).

3.27 Operand INFORMATION

◇ INFORMATION

If `INFO=2`, one prints the function (`IMPR_FONCTION` format `TABLE`) in the file `MESSAGE`.

4 Examples

4.1 Calculation of an envelope

The command file which follows:

```
DEPI=2. * pi
PAS0=DEPI/200.
LI1=DEFI_LISTE_REEL ( DEBUT=0.,
                    INTERVALLE=_F ( JUSQU_A = DEPI, NOT =
PAS0))

COa = FORMULA (NOM_PARA=' INST', VALE=' cos (INST) `)
SIa = FORMULA (NOM_PARA=' INST', VALE=' sin (INST) `)

CO = CALC_FONC_INTERP (    FONCTION=COa,    LIST_PARA=LI1,
                          NOM_PARA=' INST',
                          NOM_RESU=' DEPL',
                          PROL_GAUCHE=' EXCLU', PROL_DROITE=' LINEAIRE',
                          INTERPOL=' LIN',
                          TITRE=' FUNCTION COSINUS'    )

IF = CALC_FONC_INTERP (    FONCTION=SIa,    LIST_PARA=LI1,
                          NOM_PARA=' INST',
                          NOM_RESU=' DEPLACEMENT',
                          PROL_GAUCHE=' EXCLU',
                          PROL_DROITE=' CONSTANT',
                          INTERPOL=' LIN',
                          TITRE=' FUNCTION SINE `    )

ENV1=CALC_FONCTION (ENVELOPPE=_F (    FUNCTION = (IF, CO),
                                   CRITERION = `SUP`))
```

4.2 Calculation of the derivative of the function if

The orders which follow

```
der1 = CALC_FONCTION (DERIVE=_F (FONCTION= if),)

inst1 = 20. * not

TEST_FONCTION (    VALEUR=
                _F (    FUNCTION = der1,
NOM_PARA = `inst`,
                VALE_PARA= inst1,
VALE_REFE= COa (inst1),)
                )
```

produce on the file `RESULT` :

```
---- FUNCTION : DER1
OK INST        RELA    -0.016%    VALE: 8.0888392298046D-01
6.28319E-01 SHEET    0.100%    REFE: 8.0901699437495D-01
```

4.3 Concatenation of two functions

```
DFC1=DEFI_FONCTION (  NOM_PARA=' X',  NOM_RESU=' Y',  
                      VALE= (      0. , 10. ,  
                                4. , 14. ,  
                                6. , 16. ,),  
                      PROL_DROITE=' LINEAIRE',  
                      PROL_GAUCHE=' LINEAIRE'  
                    )
```

#

```
DFC2=DEFI_FONCTION (  NOM_PARA=' X',  NOM_RESU=' Y',  
                      VALE= (      5. , 25. ,  
                                7. , 27. ,  
                                8. , 28. ,),  
                      PROL_DROITE=' LINEAIRE',  
                      PROL_GAUCHE=' LINEAIRE'  
                    )
```

#

```
DFC3=CALC_FONCTION (  ASSE=_F (      FUNCTION = (DFC2, DFC1,),  
                                OVERLOAD = 'RIGHT')  
                    )
```

```
DFC4=CALC_FONCTION (  ASSE=_F (      FUNCTION = (DFC1, DFC2,),  
                                OVERLOAD = 'LEFT')  
                    )
```

Values of the function dfc3 are:

X	=	0.	4.	5.	7.
8.	there	=	10.	14.	25.
28.					27.

Values of the function dfc4 are:

X	=	0.	4.	6.	7.
8.	there	=	10.	14.	16.
28.					27.

4.4 Composition of two functions

```
fonc1 = DEFI_FONCTION (  NOM_PARA = 'X',  
                        NOM_RESU = 'F',  
                        VALE = (      0. ,  
                                2. , 5. ,  
                                3. , 10. ,  
                                5. , 15. ,  
                                7. , 13. ,
```

```
      8. ,          10. ,  
      10. , 9. ,  
      12. , 8. ,  
      13. , 5. ,  
      15. , 1. ,  
      20. , 0.      )      )  
fonc2 = DEFI_FONCTION (      NOM_PARA      =      'INST',  
                        NOM_RESU      =      'X',  
                        VALE      =      (      0. ,  
                        0.1, 2. ,  
                        0.2 , 4. ,  
                        0.3 , 6. ,  
                        0.4 , 8. ,  
                        0.5 , 10. ,  
                        0.6 , 12. ,  
                        0.7 , 14. ,  
                        0.8 , 16. ,  
                        0.9 , 18. ,  
                        1.0 , 20.      )      )  
comp1 = CALC_FONCTION (      COMPOSE =      _F (      FONC_RESU = fonc1,  
                        FONC_PARA = fonc2 )  
                        )
```

Values of the function comp1 are:

inst =	0.	0.1	0.2	0.3	0.4	0.5	0.6	0.7
	0.8	0.9	1.0					
F	=	0.	5.	12.5	14.	10.	9.	
	8.	3.	0.8	0.4	0.			