
Operator POST_RELEVE_T

1 Goal

To extract from the values of components of fields of sizes and to carry out calculations of moyeborn and from invariants. The values are recorded on nodes, meshes, broken lines connecting of the nodes or on beforehand definite loci like concepts of the type `curve` (`INTE_MAIL_2D` [U4.81.11]) or `surface` (`INTE_MAIL_3D` [U4.81.12]). They can be the subject, by this same procedure:

- calculations of:
 - averages,
 - resultants and moments of vector fields,
 - invariants of tensorial fields,
 - directional trace of fields,
 - extrema and arithmetic mean on nodes or meshes
- of expression in the reference marks `TOTAL`, `ROOM`, `POLAR`, `USER` or `CYLINDRICAL`.

`POST_RELEVE_T` product a concept of the type `table`, which can be printed using `IMPR_TABLE` [U4.91.03].

2 General syntax

```

tresu [tabl_sdaster] = POST_RELEVE_T (
  ♦ ACTION = _F (
    ♦ ENTITLE = name , [K8]
    ♦ OPERATION = | 'EXTRACTION' , [K16]
                  | 'AVERAGE' ,
                  | 'EXTREMA' ,
                  | 'MOYENNE_ARITH' ,

    ♦ / case OPERATION = 'EXTRACTION' or 'AVERAGE' :

    / WAY = / curve, [curve]
            / surface, [surface]
    / ♦ | NODE = lnoe, [l_noeud]
        | GROUP_NO = lgrno, [l_gr_noeud]
    ◊ / ALL = 'YES' ,
        / | MESH = lmail, [l_maille]
          | GROUP_MA= lgrma, [l_gr_maille]

    / case OPERATION = 'EXTREMA' or 'MOYENNE_ARITH' :

        | ALL = 'YES' ,
        | NODE = lnoe, [l_noeud]
        | GROUP_NO = lgrno, [l_gr_noeud]
        | MESH = lmail, [l_maille]
        | GROUP_MA= lgrma, [l_gr_maille]

    ◊ FORMAT_C = / 'MODULE' , [DEFECT]
                 / 'REAL' ,
                 / 'IMAG' ,

    ♦ / CHAM_GD = chpgd, / [cham_no_sdaster]
        / [cham_elem]

    / RESULT = resu, / [evol_elas]
                  / [evol_ther]
                  / [evol_noli]
                  / [mode_flamb]
                  / [dyna_trans]
                  / [dyna_harmo]
                  / [mode_meca]
                  / [mode_stat]
                  / [fourier_elas]
                  / [fourier_ther]
                  / [mult_elas]
                  / [mode_acou]
                  / [acou_harmo]
                  / [base_modale]

    ♦ NOM_CHAM = chpsymbo, [K16]
    ♦ / TOUT_ORDRE = 'YES' ,
      / NUME_ORDRE = lordre, [l_I]
      / LIST_ORDRE = lenti, [listis]
      / NUME_MODE = lmode, [l_I]
      / LIST_MODE = lenti, [listis]

```

```

/  NOM_CAS      =  nomcas,                [K24]
/  NOEUD_CMP    =  noeucmp,                [K24]
/  /  FREQ      =  lfreq,                  [l_R]
/  LIST_FREQ    =  lreel,                  [lstr8]
/  INST         =  linst,                  [l_R]
/  LIST_INST    =  lreel,                  [lstr8]
◇  |  PRECISION= /prec,                    [R]
/  / 1.D-6,                                [DEFECT]
◇  |  'RELATIVE' CRITERE= /,                [DEFECT]
/  / 'ABSOLUTE',
◇  / TOUT_CMP   =  'YES',
/  NOM_CMP      =  lcmp,                    [l_K8]
◇  REFERENCE MARK = / 'TOTAL',
[DEFECT]
/  'POLAR',
/  'LOCAL',
◇  VECT_Y = (oy1, oy2, oy3), [l_R]
/  'USER',
◇  ANGL_NAUT = (has, B, c), [l_R]
/  'CYLINDRICAL',
◇  ORIGIN = (X, there, Z), [l_R]
◇  AXE_Z = (oz1, oz2, oz3), [l_R]
|  TRAC_NOR    =  'YES',
|  TRAC_DIR    =  'YES',
◇  DIRECTION   =  (X, there, [Z]),          [l_R]
/  INVARIANT   =  'YES',
/  ELEM_PRINCIPAUX= 'YES',
/  RESULTANT   =  lcmp,                    [l_K8]
◇  MOMENT      =  lcmp,                    [l_K8]
◇  NOT         =  (X, there, [Z]),          [l_R]
◇  MOYE_NOEUD= / 'YES',                    [DEFECT]
) / 'NOT',
◇  TITLE = title                          [l_Kn]
)

```

3 Principles of use of POST_RELEVE_T : operand ACTION

The postprocessing carried out by POST_RELEVE_T require the data of three information:

- place,
- object,
- nature.

Each occurrence of the keyword factor ACTION this triplet defines.

place postprocessing indicates a geometrical figure connecting the points of post - treatment. This place is defined by means of the keywords:

WAY
NODE
GROUP_NO

object postprocessing is defined by the choice of a field of size, components and possibly of associated quantities chosen by various keywords.

The fields of size are chosen by one of the keywords:

RESULT and keywords allowing for choice of the fields with the nodes or the fields with the elements of the structure of data result.

CHAM_GD field of size produced by an operator elementary, or extracted from a concept result by CREA_FIELD [U4.72.04].

components by:

TOUT_CMP
NOM_CMP

and quantities associated by:

INVARIANT
ELEM_PRINCIPaux
TRAC_NOR
TRAC_DIR and DIRECTION
RESULTANT and, optionally, MOMENT and NOT

nature postprocessing corresponds to the operations: keyword OPERATION

- of extraction of values: 'EXTRACTION'
- of calculation of averages (with the direction integration), of minimum and maximum on a way or an ordered group of nodes: 'AVERAGE'
- of calculation of minimum and maximum on groups or entities: 'EXTREMA'
- of calculation of averages to the arithmetic direction on groups or entities: 'MOYENNE_ARITH'

4 Choice of the place of postprocessing

4.1 OPERATION = 'EXTRACTION' or 'AVERAGE'

4.1.1 Syntax

```

♦ / WAY = / curve, [curve]
           / surface, [surface]
/ | NODE = lnoe, [l_noeud]
  | GROUP_NO = lgrno, [l_gr_noeud]
◇ / ALL = 'YES',
  / | MESH = lmail, [l_maille]
    | GROUP_MA = lgrma, [l_gr_maille]

```

4.1.2 Operands WAY / NODE / GROUP_NO/ALL/MESH/GROUP_MA

- The argument of WAY is a concept produced by one of the following operators:

INTE_MAIL_2D [U4.81.11]

The concept is reduced then is with the intersection of segment of right-hand side and/or arc of a circle with the meshes 2D of the grid Ω , that is to say with a set of ways built on meshes 1D of the grid of Ω .

INTE_MAIL_3D [U4.81.12]

The concept is reduced then to the intersection of segments of right-hand side with the meshes 3D of the grid of Ω .

The place obtained in this case is always included in Ω .

- The argument of NODE is a list of nodes while that of GROUP_NO is a list of groups of nodes. The nodes are treated in the order provided by the user. To reorder the nodes of a list, the order should be used `DEFI_GROUP/OPTION = 'NOEUD_ORDO'` [U4.22.01]
- Keywords MESH and GROUP_MA allow to limit postprocessing to a list of meshes ou/et a list of groups of meshes.

ALL = 'YES' returns to the standard case (one considers all the meshes). These keywords are not usable qu' with NODE and/or GROUP_NO.

Note:

It is disadvised using GROUP_MA or MESH with the operation AVERAGE except if the elements are segments. Let us recall that the operation AVERAGE calculate sizes according to a length L. For fuller information, it is necessary to refer in the paragraph dedicated to the keyword OPERATION where the quantities calculated using this option are presented.

The keyword TOUT=' OUI ' wants to say "all the meshes of the grid" the directly affected nodal elements on the nodes of the grid (AFFE_MODELE/NODE), in addition disadvised, are ignored postprocessing.

4.1.3 Concepts of points of postprocessing and examples

The points of postprocessing are the points of Ω where the components (or quantities derived) are evaluated. The operation of extraction carries out this evaluation.

The points of postprocessing can be classified according to two families:

- Nodes :
 - Case where the place of postprocessing is defined is by means of the keywords NODE and/or GROUP_NO, that is to say by means of the keyword WAY with a concept of the type `curve` obtained like lists of mesh 1D.
- Geometrical points:

Case where the place of postprocessing is defined by means of the keyword `WAY` with a concept of the type `curve` or `surface` obtained like meeting of segments of right-hand side and/or arcs of a circle.

4.1.4 Example of curves and parts of curve of one way

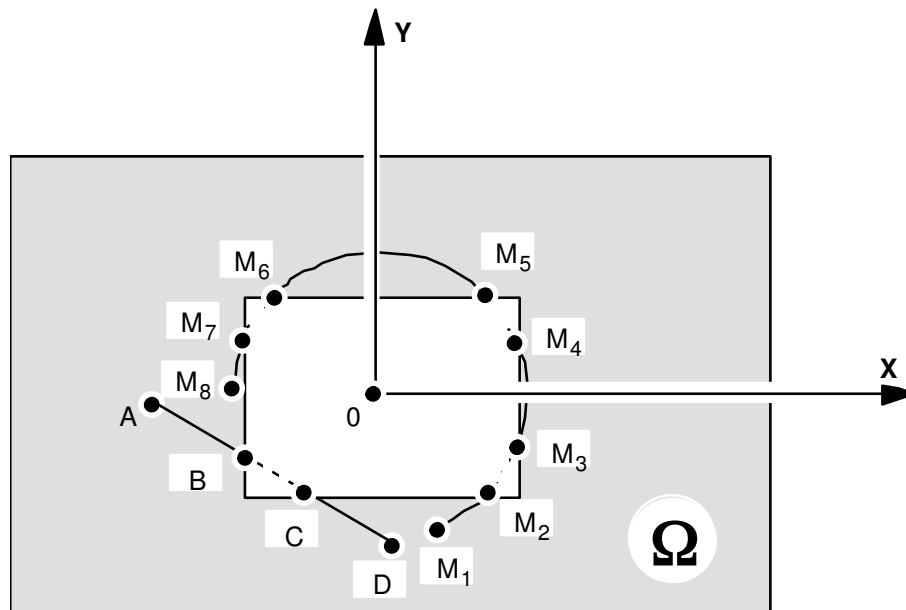


Figure 4.3.1-a

The way represented on this figure consists of two curves: the first curve corresponds to the segment of right-hand side $[AD]$ and the second with the arc of a circle of center O who connects the point M_1 at the point M_8 . The curve corresponding to the arc connecting M_1 and M_8 breaks up into four parts: arcs connecting respectively M_1 with M_2 , M_3 with M_4 , M_5 with M_6 , M_7 with M_8 , other ends of arc being external with the field.

The curve corresponding to the segment $[AB]$ breaks up into two parts: the segment $[AB]$ and the segment $[CD]$ because $[BC]$ is external with the field Ω .

4.1.5 Example of points of postprocessing corresponding to one way

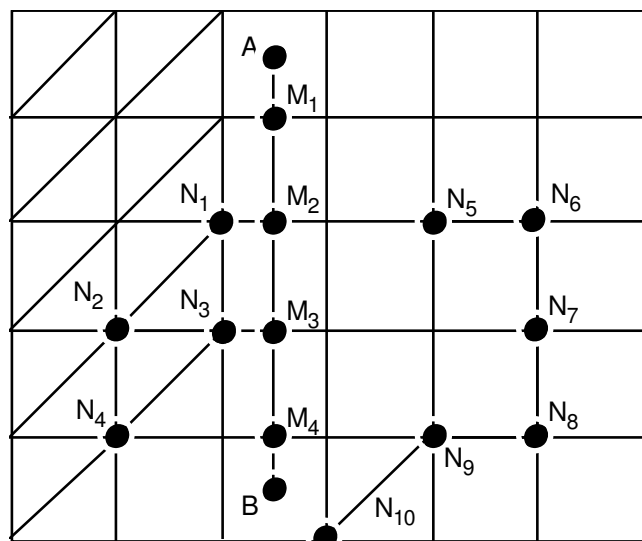


Figure 4.3.2-a

On this figure two ways are visualized.

Way n°1: the segment $[AB]$

- The points of postprocessing are reduced to $\{A, M_1, M_2, M_3, M_4, B\}$.
- The point M_i is located by the curvilinear X-coordinate $(M_i) = \|AM_i\|$
 In the case of an arc of a circle the curvilinear X-coordinate is defined by $s = R\alpha$ where R is the ray and α is the angle corresponding to the point in question.

Way n°2: meeting of two ways (two parts)

- The points of postprocessing are reduced to $\{N_1, N_2, N_3, N_4\}$ and $\{N_5, N_6, N_7, N_8, N_9, N_{10}\}$.
- The curvilinear X-coordinate locating N_i on the way of points of postprocessing $\{N_i, \dots, N_p\}$ is defined by the relations:

$$s(N_1) = 0$$

$$s(N_i) = \sum_{j=1}^{j=i-1} \|N_j N_{j+1}\| \text{ for } i=2, \dots, p$$

4.1.6 Example of points of postprocessing specified by the keywords NODE or GROUP_NO

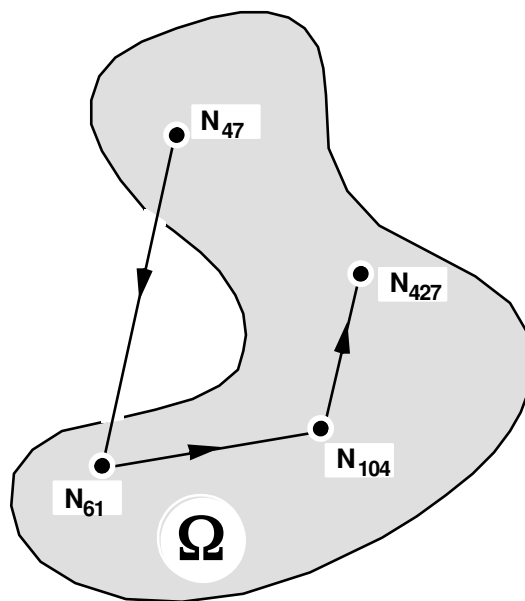


Figure 4.3.3-a

This figure visualize a place of postprocessing built starting from a list of nodes.

The points of postprocessing are the nodes represented, the place of postprocessing is the broken line connecting them according to the order provided by the user, which makes it possible to define a curvilinear X-coordinate by means of the relations presented for the ways seen previously. The value extracted on these ways is interpolated linearly between the values recorded on the nodes. Thus it should be noticed that if the operation of postprocessing is a calculation of average, all occurs like if the segment $[N_{47} N_{61}]$ was contained entire in **formula** Ω .

In this case, the curvilinear X-coordinate is calculated starting from the way defined by the course of the nodes, such as defined in the list of nodes.

4.2 OPERATION = 'EXTREMA' or 'MOYENNE_ARITH'

4.2.1 Syntax

```
♦ | ALL = 'YES',  
  | NODE = lnoe, [l_noeud]  
  | GROUP_NO = lgrno, [l_gr_noeud]  
  | MESH = lmail, [l_maille]  
  | GROUP_MA = lgrma, [l_gr_maille]
```

4.2.2 Operands ALL / NODE / GROUP_NO/MESH/GROUP_MA

- The argument of `NODE` is a list of nodes while that of `GROUP_NO` is a list of groups of nodes. The nodes are not ordered.
- Keywords `MESH` and `GROUP_MA` allow to limit postprocessing to a list of meshes ou/et a list of groups of meshes.
- `ALL = 'YES'` returns to the standard case (one considers all the meshes).

5 Object-choice of postprocessing

These keywords make it possible to define the object of postprocessing. They indicate:

- a field of size: keywords CHAM_GD, RESULT (and its associated keywords),
- a quantity associated with the components with the field: keywords TOUT_CMP, NOM_CMP, INVARIANT, ELEM_PRINCIPAUX, TRAC_NOR, TRAC_DIR, DIRECTION, REFERENCE MARK, NAP, RESULTANT, MOMENT, NOT.

5.1 Field of size

5.1.1 Syntax

```

♦ / CHAM_GD = chpgd,
  / RESULT = resu,
♦ NOM_CHAM = chpsymbo, [K16]
♦ / TOUT_ORDRE = 'YES',
  / NUME_ORDRE = lordre, [l_I]
  / LIST_ORDRE = lenti, [listis]
  / NUME_MODE = lmode, [l_I]
  / LIST_MODE = lenti, [listis]
  / NOM_CAS = nomcas, [K24]
  / / FREQ = lfreq, [l_R]
  / LIST_FREQ = lreel, [listr8]
  / INST = linst, [l_R]
  / LIST_INST = lreel, [listr8]
  ◊ | PRECISION = / prec, [R]
  / 1.D-6, [DEFECT]
  ◊ | CRITERION = / 'RELATIVE', [DEFECT]
  / 'ABSOLUTE',
◊ FORMAT_C = / 'MODULE', [DEFECT]
  / 'REAL' ,
  / 'IMAG' ,

```

5.1.2 Operand CHAM_GD

The argument of CHAM_GD is the name of a concept of the type cham_no_* or cham_elem_*.

5.1.3 Operands RESULT / NOM_CHAM / TOUT_ORDRE / NUME_ORDRE / LIST_ORDRE / NUME_MODE / LIST_MODE / NOM_CAS / FREQ / LIST_FREQ / INST / LIST_INST / PRECISION / CRITERION

See [U4.71.00].

5.1.4 Operand FORMAT_C

In the case of the complex fields, one can extract:

```

/ 'MODULE' the module
/ 'REAL' the real part
/ 'IMAG' the imaginary part

```

5.2 Components of the field and derived quantities

For the vectors and the tensors of order 2, it is possible to ask the evaluation of the components in a reference mark and to derive from the quantities obtained by contracted product. Keywords REFERENCE MARK, TRAC_NOR, TRAC_DIR and DIRECTION allow to define these quantities.

5.2.1 Syntax

```

♦ / TOUT_CMP = 'YES',
  / NOM_CMP = lcmp, [1_K8]
  ◇ / REFERENCE MARK = / 'TOTAL', [DEFECT]
    / 'POLAR',
    / 'LOCAL' ,
    ◇ VECT_Y = (oy1, oy2, oy3), [1_R]
    / 'USER',
    ♦ ANGL_NAUT = (has, B, c), [1_R]
    / 'CYLINDRICAL',
    ♦ ORIGIN = (X, there, Z), [1_R]
    ♦ AXE_Z = (oz1, oz2, oz3), [1_R]
  ◇ / TRAC_NOR = 'YES',
    / TRAC_DIR = 'YES',
    ♦ DIRECTION = (X, there, [Z]), [1_R]
  / INVARIANT = 'YES',
  / ELEM_PRINCIPAUX = 'YES',
  / RESULTANT = lcmp, [1_K8]
  ◇ MOMENT = lcmp, [1_K8]
  ♦ NOT = (X, there, [Z]), [1_R]

```

5.2.2 Operand TOUT_CMP

```
/ TOUT_CMP
```

This keyword admits for argument only the text 'YES' and selects all the components defined in the catalogue of the sizes for the size relating to the fields specified by the keywords RESULT and CHAM_GD.

5.2.3 Operands NOM_CMP

Allows to define the components of the size of the treated field:

```
/ NOM_CMP : the components are introduced by name
```

5.2.4 Operand REFERENCE MARK

```
/ REFERENCE MARK
```

The choice of a reference mark allows among the following reference marks:

- reference mark TOTAL : Cartesian reference mark of definition of the grid,
- reference mark POLAR : standard polar reference mark of the plan (OXY) (order of the components: (r, θ) ,
- reference mark ROOM : reference mark of the plan made up of the tangent and normal vectors (in this order) instead of postprocessing. The normal vector is defined in each point of post - treatment like average of the normals on the right and on the left.

Definition of the normal instead of postprocessing.

In each point of postprocessing the normal is defined like average of the normals on the right and on the left.

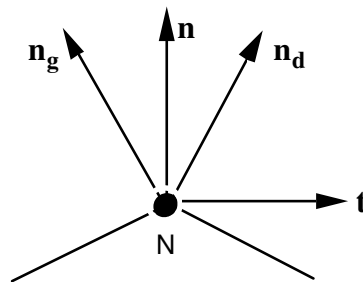


Figure 5.2.4-a

The tangent vector is obtained by a rotation of $-\pi/2$ starting from the normal vector.

In the case of the reference mark ROOM and of a way 3D (case of ASPIC for example), it will be necessary to provide:

$$\text{VECT}_Y = (\text{oy1}, \text{oy2}, \text{oy3})$$

Coordinates of a vector whose projection on the orthogonal level with the directing axis of the way will be taken as the normal with the way. The order of the components in a local reference mark is (t, n, k) .

Example of use:

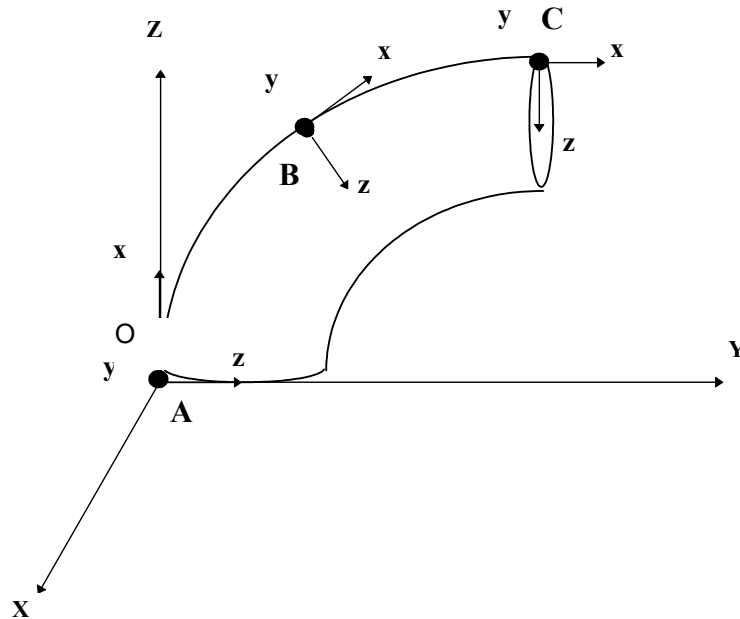


Figure 5.2.4-b

One wants to make an extraction on the way ABC according to the definite local reference mark above (local axis there in the total direction OX).

Here, one can find a vector constant in any point of the way to define the vector $VECT_Y = (1. , 0. , 0.)$.

This is possible because in any point this vector is already in the orthogonal plan with the way.

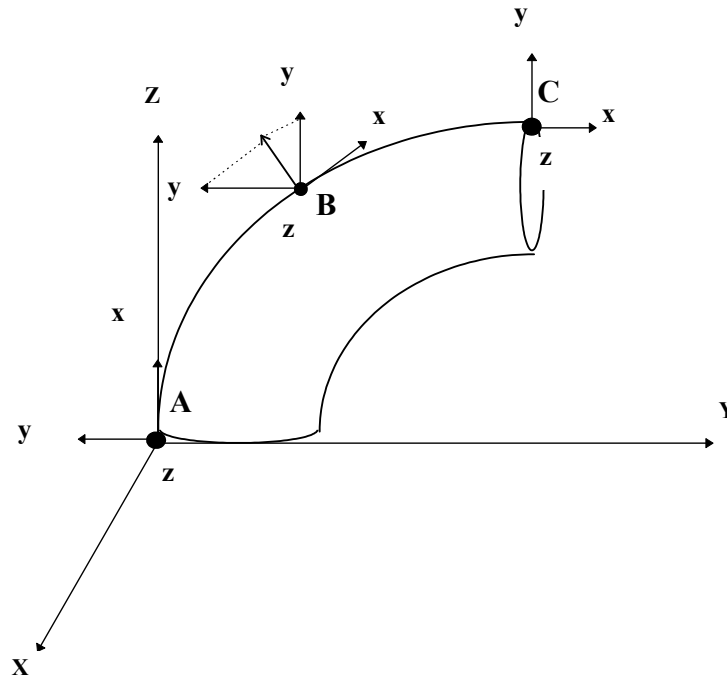


Figure 5.2.4-c

So on the other hand, one wishes to have the local axis z in the total direction OX [Figure 5.2.4-c], the vector $VECT_Y$ will depend on the point considered:

- (0., 0., 1.) is appropriate except in A (where (0., -1., 0.) is appropriate)
- (0., -1.0.) is appropriate except in C (where (0., 0., 1.) is appropriate)

It will thus be necessary in this case to cut out the way in two ways (AB and BC) and to define one $VECT_Y$ different on each way.

- reference mark **USER** : defined by the data of 3 nautical angles (in degrees):

ANGL_NAUT = (has, B, C)

- reference mark **CYLINDRICAL** defined by:

ORIGIN = (X, there, coordinates of the origin O reference mark
 Z)

AXE_Z= (oz1, oz2, coordinates of a vector defining the axis Oz (axis of the
 oz3) cylinder).

The order of the components in a cylindrical reference mark is (r, z, θ) .

5.2.5 Operand TRAC_NOR

/ TRAC_NOR: only for modelings 2D and 3D.

Determination of the normal trace of a vector or a tensor of order 2: it is the typical case of the directional trace obtained when the direction u be identified with the normal n instead of post-treatment.

5.2.6 Operands TRAC_DIR/DIRECTION

/ TRAC_DIR: only for modelings 2D and 3D.

◆ DIRECTION

Determination of the directional trace of a vector $v=(v_i)$ or of a tensor of order 2 $\sigma=(\sigma_i)$ in the direction $u=(u_i)$; i.e. scalar $v_k u_k$ or of the vector $\sigma_{ik} u_k$.

Direction u is defined by means of the keyword **DIRECTION** whose arguments are the components of the vector u data in the order X, Y, Z and evaluated in the total reference mark. If this list contains only two values then, conventionally, the component according to Z vector u is regarded as worthless.

5.2.7 Operand INVARIANT

Postprocessing of a tensor of constraint or deformation of order 2 partners to the principal directions of the tensor:

TRACE	$Tr(\sigma) = \sum_{i=1}^{2ou3} \sigma_{ii}$
VON_MIS	$VM(\sigma) = \sqrt{\sum_{i=1}^{2ou3} \frac{3}{2} \left(\sigma_{ij} - \frac{1}{3} Tr(\sigma) \delta_{ij} \right)^2}$
TRESCA	$TR(\sigma) = \max(\lambda_i - \lambda_j)$ with λ_i eigenvalues of σ
DETER	$DET(\sigma) = \text{déterminant de } \sigma$

5.2.8 Operand ELEM_PRINCIPAUX

/ ELEM_PRINCIPAUX

Determination of the principal values of a tensor 2×2 or 3×3 of order 2. They are arranged in the order ascending their values.

5.2.9 Operands RESULTANT / MOMENT / NOT

Determination of the resultant and the moment of a field of torque on the place of post - treatment. RESULTANT can be used only if OPERATION=' EXTRACTION'.

By means of computer, these keywords can apply to any field of size but so that the results have a physical direction, one will have to limit oneself to the fields of nodal forces and nodal reactions.

In this last case, 2 possibilities arise:

- the user wants to calculate the resultant of certain components of the field: he will enter behind the keyword RESULTANT a list of components to be taken among $\{ 'DX', 'DY' \}$ in 2D and $\{ 'DX', 'DY', 'DZ' \}$ in 3D or structural elements (the resultant of components of rotations not having a physical direction),
- the user wants to calculate the resultant and the moment of certain components of the field: he will enter behind the keyword RESULTANT and MOMENT 2 lists of the same components length to be taken among

formula $\{ 'DX', 'DY', 'DZ' \}$ behind the keyword RESULTANT
formula $\{ 'DRX', 'DRY', 'DRZ' \}$ behind the keyword MOMENT

Moreover, it will introduce behind the keyword NOT the list of the coordinates of the point by report to which the moment is evaluated.

If one notes P this point and M_i the points of postprocessing, the evaluated quantities will be:

- Resultant: $\mathbf{F} = \sum_i \mathbf{F}_i = \sum_i (FX_{M_i}, FY_{M_i}, FZ_{M_i})$
- Moment: $\mathbf{m} = \sum_i (P\vec{M}_i \wedge \mathbf{F}_i) + \sum_i \mathbf{m}_i^c$

where \mathbf{m}_i^c indicate the list of the concentrated moments corresponding to the components of rotation introduced by the keyword MOMENT, relevant only in the case of elements of structure (beams, hulls, discrete).

Note:

- 1) In continuous mediums, one should not introduce behind MOMENT components of translation which would be regarded as concentrated moments and thus summoned with the true moments.
- 2) The calculation of RESULTANT and/or of MOMENT is carried out by a sum on a set of nodes. This sum has direction only if all the nodal forces (or moments) are expressed in the same reference mark. That wants to say that the keyword REFERENCE MARK can only take as value 'GLOBAL' or 'USER'.

6 Nature of postprocessing

6.1 Operand OPERATION

◆ OPERATION =
| 'EXTRACTION'

The operation extraction of a field of size makes it possible to recover the values of one or more components or quantities derived from these components at the points of the place of postprocessing.

In the case of an extraction on one `cham_elem`, the values of the components extracted from this field are calculated as follows:


- if the place of postprocessing is determined by the keywords `NODE` or `GROUP_NO`, for each node the components are realised on all the elements contributing in this node,

Note:

The moyennations with the nodes of computed fields in local reference marks are licit only if the angles between these reference marks are weak. In the contrary case, they do not have a direction.

- if the place of postprocessing is a way confused with one or more edges of the grid, one makes the average on the elements having an intersection of nonworthless measurement with the way.

This can lead, for the same place of postprocessing, with appreciably different results:

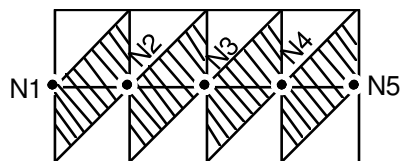

- if the place of postprocessing is a zone having double nodes (example of a crack) it is preferable to use the keywords `NODE` or `GROUP_NO`, rather than `WAY`. Indeed, if the way is on a zone of discontinuity, it is then not possible to distinguish the site from the nodes compared to this zone in the table of exit from `POST_RELEVE_T`.

If the place of postprocessing is defined by `NODE = (N1, N2, N3, N4, N5)`, the values are realised on all the elements of the grid above.

If the place of postprocessing is defined as being the segment of origin `N1` and of end `N5`, the values will be realised on the hatched elements.

In the case of quadratic elements (presence of nodes mediums), the average with the nodes tops can lead to more important weights of certain elements (function of cutting) compared to the nodes mediums which realise on 2 elements (thus of the same weight). One can thus be in the presence of oscillations between the values at the tops and the mediums.

| 'AVERAGE'

This operation is limited to 6 components of field at the same time. Being given a scalar field U (typically a component of a size), the operation 'AVERAGE' calculate the following quantities (L indicating the length of the place of post - treatment C considered):

$$\begin{aligned} \text{MOMENT_0} &= \frac{1}{L} \int_c U(s) ds \\ \text{MOMENT_1} &= \frac{12}{L^2} \int_c U(s) \left(s - \frac{L}{2} \right) ds \\ \text{MINIMUM} &= \underset{c}{\text{Min}} U \\ \text{MAXIMUM} &= \underset{c}{\text{Max}} U \\ \text{MOYE_INT} &= \text{MOMENT_0} - \frac{1}{2} \text{MOMENT_1} \\ \text{MOYE_EXT} &= \text{MOMENT_0} + \frac{1}{2} \text{MOMENT_1} \end{aligned}$$

It is important that the place of postprocessing is traversed in a direction. If a group of nodes is used, one will take care to reorder the nodes, by using the order `DEFI_GROUP OPTION 'NOEUD_ORDO'`, [U4.22.01]. Thus, L' X-coordinate curvilinear is defined since the node origin of the group, while following the broken line consisted the nodes.

The integrals above are evaluated while supposing U linear between two nodes. Thus, while noting U_i values of the field to the nodes (numbered by $i = 1, \dots, N$) of X-coordinate s_i , one a:

$$\begin{aligned} \text{MOMENT_0} &= \frac{1}{2(s_N - s_1)} \sum_{i=1}^{N-1} (s_{i+1} - s_i)(U_i + U_{i+1}) \\ \text{MOMENT_1} &= \frac{2}{(s_N - s_1)^2} \sum_{i=1}^{N-1} (s_{i+1} - s_i) (U_i(s_{i+1} + 2s_i) + U_{i+1}(2s_{i+1} + s_i)) \\ &\quad - \frac{3}{(s_N - s_1)} \sum_{i=1}^{N-1} (s_{i+1} - s_i)(U_i + U_{i+1}) \end{aligned}$$

| 'EXTREMA'

calculate them `MIN`, `MAX`, `MINI_ABS`, `MAXI_ABS` of a field possibly reduces on a list of nodes or meshes, on all the components or a list of components.

6.2 Operand MOYE_NOEUD

Keyword allowing for choice of an impression detailed or realised in a point. This keyword is significant only for the sizes of the type `cham_elem` and for the operation `EXTRACTION`.

`MOYE_NOEUD = 'YES'`

For each point of postprocessing, the displayed value of a component or a deducted quantity is obtained like average of the values given by each convergent mesh in this point. The way of making the average is the same one as for the fields calculated by `CALC_CHAMP` [U4.81.04].

`MOYE_NOEUD = 'NOT'`

The list of the values obtained for each convergent mesh at the point of postprocessing is displayed.

7 Operands of access and impression of the contents of the tables created by `POST_RELEVE_T`

7.1 Principles of addressing of the contents of the tables

The statements of values are arranged in concepts of the type `table`. The tables are Bi - subscripted. The first index is the parameter, this one is defined by the operator according to the action considered (see [Table 7.4-a]). The second index is the variable, this one is defined by the user. The variables can be the names of the nodes, the names of the components or the numbers of the points of post - treatment along a way.

7.2 Operand `ENTITLE`

- ◆ `ENTITLE = matable` [K8]
 Name of the table of statements of values.

7.3 Operand `TITLE`

- ◇ `TITLE = title`
 Title which one wants to give to the table of statements of values. For more details, to see [U4.03.01].

7.4 Definition of the parameters and the variables

With the impression on the file `RESULT`, each parameter is printed on a column, the printed variables being line by line.

Keywords	Parameters	Variables
<code>OPERATION = 'AVERAGE'</code> (keywords <code>TOUT_CMP</code> , <code>NOM_CMP</code>) (example [§9.2.2])	<code>MOMENT_0</code> <code>MOMENT_1</code> <code>MINIMUM</code> <code>MAXIMUM</code> <code>MOYE_INT</code> <code>MOYE_EXT</code>	Names of the components
<code>OPERATION = 'MOYENNE_ARITH'</code> (keywords <code>TOUT_CMP</code> , <code>NOM_CMP</code>)	<code>AVERAGE</code>	Names of the components
<code>OPERATION = 'EXTREMA'</code> (keywords <code>TOUT_CMP</code> , <code>NOM_CMP</code>)	<code>VALE</code>	Names of the components
<code>OPERATION = 'EXTRACTION'</code> (keyword <code>IMPR_NOEUD = 'YES'</code>)	-	Names of the nodes if <code>NODE</code> or <code>GROUP_NO</code> Number of the point if <code>WAY</code>
<code>OPERATION = 'EXTRACTION'</code> (keyword <code>IMPR_NOEUD = 'NOT'</code>)	-	Names of the nodes concaténés with the names of the meshes if <code>NODE</code> or <code>GROUP_NO</code> Number of the point if <code>WAY</code>
<code>TOUT_CMP</code> <code>NOM_CMP</code> (examples [§9.1] and [§9.2.1])	<code>ABSC_CURV</code> <code>COOR_X</code> <code>COOR_Y</code> <code>COOR_Z</code> follow-up of the name of the components	-
<code>NOM_CMP</code> <code>TRAC_NOR</code> <code>TRAC_DIR</code> (examples [§9.3] and [§9.4])	<code>ABSC_CURV</code> <code>COOR_X</code> <code>COOR_Y</code> <code>COOR_Z</code> <code>DIR_1</code> <code>DIR_2</code> <code>DIR_3</code>	-
<code>INVARIANT</code> (example [§9.5])	<code>ABSC_CURV</code> <code>COOR_X</code> <code>COOR_Y</code> <code>COOR_Z</code> <code>VON_MIS</code> <code>TRESCA</code> <code>TRACE</code> <code>DETER</code>	-
<code>ELEM_PRINCIPAUX</code> (example [§9.6])	<code>ABSC_CURV</code> <code>COOR_X</code> <code>COOR_Y</code> <code>COOR_Z</code> <code>VAL_PR_1</code> <code>VAL_PR_2</code> <code>VAL_PR_3</code>	-

Keywords	Parameters	Variables
RESULTANT MOMENT (examples [§9.7] and [§9.8])	Names of the components	-
REFERENCE MARK = 'POLAR' (example [§9.9])	ABSC_CURV COOR_X COOR_Y COOR_Z follow-up of the name of the components	-
REFERENCE MARK 'CYLINDRICAL'	= ABSC_CURV COOR_X COOR_Y COOR_Z follow-up of the name of the components	

Table 7.4-a

For the significance of the parameter ABSC_CURV, to see §4.1.5 and §4.1.6

For the reference marks POLAR and CYLINDRICAL, the significance of the components is:

DX : ray r , DY : ordinate on the axis of the cylinder z , DZ : angle θ (see U2.07.01 §2 and §5.2)

8 Phase of checking

It is checked that the headings all are different.

8.1 During the execution

This phase checks the coherence of the arguments between them. It relates to all the occurrences of the keyword factor ACTION. One distinguishes 2 groups from checks.

first group is common to the arguments of the keyword CHAM_GD and RESULT (which is excluded mutually) and is reduced to the following checks:

- acceptability of the components:
it is checked that the required components are quite present at the catalogue of description of the size to treat,
- coherence of the grid:
it is checked that the grid on which the size was calculated is the grid on which the place of postprocessing (case of the keyword is built WAY) or contains the nodes passed in argument (case of the keywords NODE and/or GROUP_NO).

second group is specific to the keyword RESULT, and is reduced to the checks:

- checking of the acceptability of the field symbolic system:
one makes sure that the field symbolic system argument of the keyword NOM_CHAM exist well for the type of concept result argument of the keyword RESULT,
- existence of at least a structure of data for the field symbolic system to treat.

At the conclusion of the phase of checking, in production run the following alternative arises:

- all occurrences of ACTION are correct and the operations are launched,
- at least an occurrence of ACTION is incorrect, then an error message fatal is produced with stop of the order. Information informs about the nature of the errors and the means of correcting them.

8.2 During the treatment

A new filter of checking is presented but never causes the stop of the order. This filter is reduced to the following checks:

- existence of the structure of data indicated by CHAM_GD or RESULT and one of the keywords giving access in a structure of data RESULT.
In the event of failure a message is transmitted and the following occurrence is treated,

- in the case of a calculation of tensorial invariants, one checks that the object of the treatment indicates well a tensor of order 2,
- in the case of a calculation of average or a request for extraction of values, one checks that the components to be treated were indeed calculated on the place of the post - treatment. In the event of failure of this checking, a message details the components nonavailable according to the meshes or nodes of the place of post - treatment.

If this last filter does not detect any impossibility of calculation, postprocessing is launched and the results are inserted in the table.

9 Examples

The examples which follow apply to the same physical problem (case test SHLV100G).

9.1 Keywords 'EXTRACTION' 'AVERAGE' 'EXTREMA' 'MOYENNE_ARITH'

9.1.1 'EXTRACTION'

9.1.1.1 Orders

```
# extraction of the CMP of the tensor of the constraints on a list of nodes
#
t2 = POST_RELEVE_T (ACTION = _F (
      ENTITLE = 'ex_2',
      NODE    = ('N1', 'N347', 'N21', 'N432', 'N39',
                'N229'),
      CHAM_GD = SIGMA,
      NOM_CMP = ('SIXX', 'SIYY', 'SIZZ', 'SIXY'),
      OPERATION = 'EXTRACTION' ) )
```

9.1.1.2 Result

```
--- POST_TRAITEMENT NUMBER: 1 - FIELD NUMBER      : 1
FIELD BY ELEMENT WITH THE NODES
EXTRACTION TENSOR FORCED
TOTAL REFERENCE MARK
CHEMIN DE NOEUDS
T2 CONCEPT OF THE TYPE TABL_POST_RELE CALCULATES FROM THE CONCEPT SIGMA
TABLE: EX_2      EXIT OF THE T2 TABLE
      ABSC_CURV   COOR_X   COOR_Y   COOR_Z   SIXX   SIYY   SIZZ   SIXY
N1      0.00000E+00  1.00000E-01  0.00000E+00  0.00000E+00 -9.96843E-01  1.66549E+00  2.00595E-01 -2.97371E-04
N347    1.00000E-01  2.00000E-01  0.00000E+00  0.00000E+00 -2.39383E-04  6.67596E-01  2.00207E-01 -2.65146E-05
N21     2.14214E-01  9.23880E-02  3.82683E-02  0.00000E+00 -6.06951E-01  1.27563E+00  2.00603E-01 -9.41280E-01
N432    3.14214E-01  1.84776E-01  7.65367E-02  0.00000E+00  9.75617E-02  5.69793E-01  2.00206E-01 -2.36114E-01
N39     4.28428E-01  7.07107E-02  7.07107E-02  0.00000E+00  3.34029E-01  3.34628E-01  2.00597E-01 -1.33117E+00
N229    5.28428E-01  1.41421E-01  1.41421E-01  0.00000E+00  3.33660E-01  3.33711E-01  2.00211E-01 -3.33924E-01
```

9.1.2 'AVERAGE'

9.1.2.1 Orders

```
# average of the CMP of the tensor of the constraints on a list of nodes
#
T3 = POST_RELEVE_T (ACTION=_F (ENTITLES = 'ex_3',
      NODE    = ('N1', 'N347', 'N21', 'N432', 'N39',
                'N229'),
      CHAM_GD = SIGMA,
      NOM_CMP = ('SIXX', 'SIYY', 'SIZZ', 'SIXY'),
      OPERATION = 'AVERAGE', ) , )
```

9.1.2.2 Result

```
--- POST_TRAITEMENT NUMBER: 1 - FIELD NUMBER      : 1
FIELD BY ELEMENT WITH THE NODES
AVERAGE TENSOR FORCED
TOTAL REFERENCE MARK
CHEMIN RELIANT LES NOEUDS:
N1      N347   N21     N432   N39     N229
CONCEPT T3 OF THE TYPE TABL_POST_RELE CALCULATES FROM THE CONCEPT SIGMA
TABLE: EX_3      EXIT OF TABLE T3
```


	MOMENT_0	MOMENT_1	MINIMUM	MAXIMUM	MOYE_INT	MOYE_EXT
SIXX	-9.83430E-02	1.17015E+00	-9.96843E-01	3.34029E-01	-6.83419E-01	4.86733E-01
SIYY	7.66354E-01	-1.17020E+00	3.33711E-01	1.66549E+00	1.35145E+00	1.81254E-01
SIZZ	2.00403E-01	-1.44941E-05	2.00206E-01	2.00603E-01	2.00411E-01	2.00396E-01
SIXY	-5.40089E-01	-1.03327E+00	-1.33117E+00	-2.65146E-05	-2.34562E-02	-1.05672E+00

9.1.3 'EXTREMA'

9.1.3.1 Orders

```
# extrema of dx displacements and drz
#
T3 = POST_RELEVE_T (ACTION=_F (
    ENTITLE = 'DEPL',
    RESULT = RESU1,
    NOM_CHAM = 'DEPL',
    NOM_CMP = ('DX', 'DRZ',),
    OPERATION = 'EXTREMA', ) ,)
```

9.1.3.2 Result

ENTITLE	RESU	NOM_CHAM	NUME_ORDRE	EXTREMA	NODE	CMP	VALE
DEPL	RESU1	DEPL	1	MAX	D	DX	3.47E-03
DEPL	RESU1	DEPL	1	MIN	D	DRZ	-6.27E-03
DEPL	RESU1	DEPL	1	MAXI_ABS	D	DRZ	6.27E-03
DEPL	RESU1	DEPL	1	MINI_ABS	With	DX	8.99E-22

9.1.4 'MOYENNE_ARITH'

9.1.4.1 Orders

```
# average of dx displacements and dz on nodes
#
t4 = POST_RELEVE_T (ACTION=_F (
    ENTITLE = 'DEPL',
    RESULT = RESU1,
    NOM_CHAM = 'DEPL',
    GROUP_NO = ('GNAB',),
    NODE = ('IT', 'OF',),
    NOM_CMP = ('DX', 'DZ',),
    OPERATION = 'MOYENNE_ARITH', ) ,)
```

9.1.4.2 Result

ENTITLE	RESU	NOM_CHAM	NUME_ORDRE	CMP	AVERAGE
DEPL	RESU1	DEPL	1	DX	9.47536E-04
DEPL	RESU1	DEPL	1	DZ	0.00000E+00

9.2 Operands WAY / TRAC_NOR

9.2.1 Orders

```
# normal trace has a segment of the tensor of the constraints
#
t4 = POST_RELEVE_T (ACTION = _F (
                                ENTITLE = 'ex_4',
                                WAY      = AB,
                                CHAM_GD  = SIGMA,
                                NOM_CMP   = ('SIXX', 'SIYY', 'SIZZ', 'SIXY'),
                                TRAC_NOR  = 'YES',
                                OPERATION = 'EXTRACTION', ) )
```

9.2.2 Result

```
--- POST_TRAITEMENT NUMBER: 1 - FIELD NUMBER          : 1

FIELD BY ELEMENT WITH THE NODES

EXTRACTION TRACE_NORMALE TENSOR FORCED
LOCAL REFERENCE MARK

SEGMENT OF RIGHT-HAND SIDE
ORIGIN          : ( 1.000000E-01, 0.000000E+00)
END             : ( 2.000000E-01, 0.000000E+00)
CURVILINEAR X-COORDINATES: ( 0.000000E+00, 1.000000E-01)

T4 CONCEPT OF THE TYPE TABL_POST_RELE CALCULATES FROM THE CONCEPT SIGMA
TABLE: EX_4      EXIT OF THE T4 TABLE

      ABSX_CURV   COOR_X   COOR_Y   COOR_Z   DIR_1   DIR_2   DIR_3
00000001  0.000000E+00  1.000000E-01  0.000000E+00  0.000000E+00  2.97371E-04 -1.66549E+00  0.000000E+00
00000002  9.99995E-03  1.100000E-01  0.000000E+00  0.000000E+00  1.65667E-04 -1.43451E+00  0.000000E+00
00000003  1.99999E-02  1.200000E-01  0.000000E+00  0.000000E+00  1.49649E-04 -1.25935E+00  0.000000E+00
00000004  2.99999E-02  1.300000E-01  0.000000E+00  0.000000E+00  1.28087E-04 -1.12286E+00  0.000000E+00
00000005  3.99999E-02  1.400000E-01  0.000000E+00  0.000000E+00  1.10722E-04 -1.01444E+00  0.000000E+00
00000006  4.99999E-02  1.500000E-01  0.000000E+00  0.000000E+00  9.64779E-05 -9.26905E-01  0.000000E+00
00000007  6.00000E-02  1.600000E-01  0.000000E+00  0.000000E+00  8.49028E-05 -8.55210E-01  0.000000E+00
00000008  7.00000E-02  1.700000E-01  0.000000E+00  0.000000E+00  7.51468E-05 -7.95754E-01  0.000000E+00
00000009  7.99999E-02  1.800000E-01  0.000000E+00  0.000000E+00  6.71302E-05 -7.45902E-01  0.000000E+00
00000010  8.99999E-02  1.900000E-01  0.000000E+00  0.000000E+00  6.04973E-05 -7.03691E-01  0.000000E+00
00000011  1.00000E-01  2.000000E-01  0.000000E+00  0.000000E+00  2.65146E-05 -6.67596E-01  0.000000E+00
```

9.3 Operands TRAC_DIR / DIRECTION

9.3.1 Orders

```
# directional trace data by a vector
#
t5 = POST_RELEVE_T (ACTION = _F (
                                ENTITLE   = 'ex_5',
                                WAY       = AB,
                                CHAM_GD   = SIGMA,
                                NOM_CMP    = ('SIXX', 'SIYY', 'SIZZ',
                                'SIXY'),
                                TRAC_DIR  = 'YES',
                                DIRECTION  = (1. , 0. , 0. ),
                                OPERATION  = 'EXTRACTION' ) , )
```

9.3.2 Result

```
--- POST_TRAITEMENT NUMBER: 1 - FIELD NUMBER          : 1

FIELD BY ELEMENT WITH THE NODES

EXTRACTION TRACE_DIRECTIONELLE TENSOR FORCED
```

TOTAL REFERENCE MARK

SEGMENT OF RIGHT-HAND SIDE

ORIGIN : (1.000000E-01, 0.000000E+00)

END : (2.000000E-01, 0.000000E+00)

CURVILINEAR X-COORDINATES: (0.000000E+00, 1.000000E-01)

T5 CONCEPT OF THE TYPE TABL_POST_RELE CALCULATES FROM THE CONCEPT SIGMA
TABLE: EX_5 EXIT OF THE T5 TABLE

	ABSC_CURV	COOR_X	COOR_Y	COOR_Z	DIR_1	DIR_2	DIR_3
00000001	0.00000E+00	1.00000E-01	0.00000E+00	0.00000E+00	-9.96843E-01	-2.97371E-04	0.00000E+00
00000002	9.99995E-03	1.10000E-01	0.00000E+00	0.00000E+00	-7.66170E-01	-1.65667E-04	0.00000E+00
00000003	1.99999E-02	1.20000E-01	0.00000E+00	0.00000E+00	-5.91136E-01	-1.49649E-04	0.00000E+00
00000004	2.99999E-02	1.30000E-01	0.00000E+00	0.00000E+00	-4.54764E-01	-1.28087E-04	0.00000E+00
00000005	3.99999E-02	1.40000E-01	0.00000E+00	0.00000E+00	-3.46463E-01	-1.10722E-04	0.00000E+00
00000006	4.99999E-02	1.50000E-01	0.00000E+00	0.00000E+00	-2.59035E-01	-9.64779E-05	0.00000E+00
00000007	6.00000E-02	1.60000E-01	0.00000E+00	0.00000E+00	-1.87445E-01	-8.49028E-05	0.00000E+00
00000008	7.00000E-02	1.70000E-01	0.00000E+00	0.00000E+00	-1.28092E-01	-7.51468E-05	0.00000E+00
00000009	7.99999E-02	1.80000E-01	0.00000E+00	0.00000E+00	-7.83393E-02	-6.71302E-05	0.00000E+00
00000010	8.99999E-02	1.90000E-01	0.00000E+00	0.00000E+00	-3.62263E-02	-6.04973E-05	0.00000E+00
00000011	1.00000E-01	2.00000E-01	0.00000E+00	0.00000E+00	-2.39383E-04	-2.65146E-05	0.00000E+00

9.4 Operand INVARIANT

9.4.1 Orders

invariants of the tensor of the constraints

#

```
t6 = POST_RELEVE_T (ACTION = _F (
    ENTITLE = 'ex_6',
    WAY = AB,
    CHAM_GD = SIGMA,
    INVARIANT = 'YES',
    OPERATION = 'EXTRACTION' ) , )
```

9.4.2 Result

--- POST_TRAITEMENT NUMBER: 1 - FIELD NUMBER : 1

FIELD BY ELEMENT WITH THE NODES

EXTRACTION INVARIANTS TENSOR FORCED

TOTAL REFERENCE MARK

SEGMENT OF RIGHT-HAND SIDE

ORIGIN : (1.000000E-01, 0.000000E+00)

END : (2.000000E-01, 0.000000E+00)

CURVILINEAR X-COORDINATES: (0.000000E+00, 1.000000E-01)

T6 CONCEPT OF THE TYPE TABL_POST_RELE CALCULATES FROM THE CONCEPT SIGMA

TABLE: EX_6 EXIT OF THE T6 TABLE

	ABSC_CURV	COOR_X	COOR_Y	COOR_Z	VON MIS	TRESCA	TRACE	DETER
00000001	0.00000E+00	1.00000E-01	0.00000E+00	0.00000E+00	2.30953E+00	2.66234E+00	8.69246E-01	-3.33035E-01
00000002	9.99995E-03	1.10000E-01	0.00000E+00	0.00000E+00	1.91053E+00	2.20068E+00	8.68843E-01	-2.20368E-01
00000003	1.99999E-02	1.20000E-01	0.00000E+00	0.00000E+00	1.60813E+00	1.85049E+00	8.68679E-01	-1.49235E-01
00000004	2.99999E-02	1.30000E-01	0.00000E+00	0.00000E+00	1.37278E+00	1.57762E+00	8.68524E-01	-1.02346E-01
00000005	3.99999E-02	1.40000E-01	0.00000E+00	0.00000E+00	1.18613E+00	1.36091E+00	8.68375E-01	-7.04321E-02
00000006	4.99999E-02	1.50000E-01	0.00000E+00	0.00000E+00	1.03570E+00	1.18594E+00	8.68232E-01	-4.81069E-02
00000007	6.00000E-02	1.60000E-01	0.00000E+00	0.00000E+00	9.12789E-01	1.04266E+00	8.68094E-01	-3.21138E-02
00000008	7.00000E-02	1.70000E-01	0.00000E+00	0.00000E+00	8.11140E-01	9.23846E-01	8.67961E-01	-2.04163E-02
00000009	7.99999E-02	1.80000E-01	0.00000E+00	0.00000E+00	7.26193E-01	8.24241E-01	8.67831E-01	-1.17024E-02
00000010	8.99999E-02	1.90000E-01	0.00000E+00	0.00000E+00	6.54545E-01	7.39918E-01	8.67704E-01	-5.10453E-03
00000011	1.00000E-01	2.00000E-01	0.00000E+00	0.00000E+00	5.93563E-01	6.67835E-01	8.67563E-01	-3.19954E-05

9.5 Operand ELEM_PRINCIPAUX

Warning : The translation process used on this website is a "Machine Translation". It may be imprecise and inaccurate in whole or in part and is provided as a convenience.

Copyright 2017 EDF R&D - Licensed under the terms of the GNU FDL (<http://www.gnu.org/copyleft/fdl.html>)

9.5.1 Orders

```
# principal values of the tensor of the constraints
#
t7 = POST_RELEVE_T (ACTION = _F (
                                ENTITLE      = 'ex_7',
                                WAY           = AB,
                                CHAM_GD      = SIGMA,
                                ELEM_PRINCIPAUX = 'YES',
                                OPERATION     = 'EXTRACTION', ) )
```

9.5.2 Result

```
--- POST_TRAITEMENT NUMBER: 1 - FIELD NUMBER      : 1
FIELD BY ELEMENT WITH THE NODES
EXTRACTION TENSOR FORCED
TOTAL REFERENCE MARK
SEGMENT OF RIGHT-HAND SIDE
ORIGIN      : ( 1.000000E-01, 0.000000E+00)
END         : ( 2.000000E-01, 0.000000E+00)
CURVILINEAR X-COORDINATES: ( 0.000000E+00, 1.000000E-01)
T7 CONCEPT OF THE TYPE TABL_POST_RELE CALCULATES FROM THE CONCEPT SIGMA
TABLE: EX_7      EXIT OF THE T7 TABLE
      ABSC_CURV   COOR_X   COOR_Y   COOR_Z   VAL_PR_1   VAL_PR_2   VAL_PR_3
00000001 0.000000E+00 1.000000E-01 0.000000E+00 0.000000E+00 -9.96844E-01 2.00594E-01 1.66549E+00
00000002 9.99995E-03 1.100000E-01 0.000000E+00 0.000000E+00 -7.66170E-01 2.00501E-01 1.43451E+00
00000003 1.99999E-02 1.200000E-01 0.000000E+00 0.000000E+00 -5.91137E-01 2.00463E-01 1.25935E+00
00000004 2.99999E-02 1.300000E-01 0.000000E+00 0.000000E+00 -4.54764E-01 2.00428E-01 1.12286E+00
00000005 3.99999E-02 1.400000E-01 0.000000E+00 0.000000E+00 -3.46464E-01 2.00393E-01 1.01444E+00
00000006 4.99999E-02 1.500000E-01 0.000000E+00 0.000000E+00 -2.59035E-01 2.00361E-01 9.26905E-01
00000007 6.00000E-02 1.600000E-01 0.000000E+00 0.000000E+00 -1.87445E-01 2.00329E-01 8.55210E-01
00000008 7.00000E-02 1.700000E-01 0.000000E+00 0.000000E+00 -1.28092E-01 2.00298E-01 7.95754E-01
00000009 7.99999E-02 1.800000E-01 0.000000E+00 0.000000E+00 -7.83395E-02 2.00268E-01 7.45902E-01
00000010 8.99999E-02 1.900000E-01 0.000000E+00 0.000000E+00 -3.62266E-02 2.00239E-01 7.03691E-01
00000011 1.00000E-01 2.000000E-01 0.000000E+00 0.000000E+00 -2.39623E-04 2.00207E-01 6.67596E-01
```

9.6 Operand RESULTANT

9.6.1 Orders

```
# calculation of the resultants of the CMP quoted on a group_no
T8 = POST_RELEVE_T (ACTION = _F(
                    RESULT = resu,
                    NOM_CHAM = 'FORC_NODA',
                    ENTITLE = 'RESULTING',
                    REFERENCE MARK = 'TOTAL',
                    OPERATION = 'EXTRACTION',
                    GROUP_NO = 'known',
                    RESULTANTE= ('DX', 'DY', 'DZ')))
```

9.6.2 Result

```
---POST_TRAITEMENT NUMBER: 1 - FIELD NUMBER      : 1
NUME_ORDRE      : 1
FIELD WITH THE NODES OF REFERENCE SYMBOL FORC_NODA
NUMBER OF ODRDRE: 1 INST: 0.00000E+00
RESULTANTE_MOMENT DISPLACEMENTS
TOTAL REFERENCE MARK
CHEMIN RELIANT LES NOEUDS:
N69N70N71N87N88N89N97N98
T8 CONCEPT OF TABL_POST_RELE CALCULATES FROM CONCEPT RESU TABLE:
```

Titre : Opérateur POST_RELEVE_T
 Responsable : BÉREUX Natacha

Date : 22/09/2016 Page : 30/31
 Clé : U4.81.21 Révision :
 c6a7543cefe1

```

RESULTAN_1          EXIT OF THE T8 TABLE          INST:
0.000000E+00
RESULTANT -1.0000000000E+01 -2.724281611E-11 7.218027734E-11

```

9.7 Operands MOMENT and NOT

9.7.1 Orders

calculation of the resultants and the moments of the CMP quoted on a group_no

```

T9 = POST_RELEVE_T (ACTION = _F
( RESULT = resu,          NOM_CHAM=' FORC_NODA',
  ENTITLE = 'RESULTANTE-MOMENT',
  REFERENCE MARK = 'TOTAL',          OPERATION =
'EXTRACTION',
  GROUP_NO = 'known',
  MOMENT = ('DRX', 'DRY MARTINI', 'DRZ'), POINT= (0. ,
0. , 0.),)
)

```

9.7.2 Result

```

---POST_TRAITEMENT NUMBER: 1 - FIELD NUMBER          : 1
NUME_ORDRE          : 1
FIELD WITH THE NODES OF REFERENCE SYMBOL FORC_NODA
NUMBER OF ODRDRE: 1 INST: 0.000000E+00

RESULTANTE MOMENT DISPLACEMENTS
MOMENT COMPARED TO THE POINT: 0.000000E+00 0.000000E+00 0.000000E+00
TOTAL REFERENCE MARK

CHEMIN RELIANT LES NOEUDS:
N69 N70 N71 N87 N88 N89 N97 N98
T9 CONCEPT OF THE TYPE TABL_POST_RELE CALCULATES FROM CONCEPT RESU COUNTS:
RESULTAN_1          EXIT OF THE T9 TABLE          INST: 0.000000E+00
                      RESULT_X          RESULT_Y          RESULT_Z          MOMENT_X
RESULTANT -1.0000000000E+01 -2.724281611E-11 7.218027734E-11 -9.744077883E-
12
RESULTANT -2.0000000000E+00 -3.0000000000E+00

```

9.8 Operand REFERENCE MARK : 'POLAIRE'

9.8.1 Orders

impression of the tensor of the constraints in POLAR reference mark on the arc AC

```

#
t10 = POST_RELEVE_T (ACTION = _F (
                      ENTITLE = 'ex_10',
                      WAY = AC,
                      REFERENCE MARK = 'POLAR',
                      CHAM_GD = SIGMA,
                      NOM_CMP = ('SIXX', 'SIYY', 'SIZZ', 'SIXY'),
                      OPERATION = 'EXTRACTION' ) ,)

```

9.8.2 Results

```

--- POST_TRAITEMENT NUMBER: 1 - FIELD NUMBER          : 1

FIELD BY ELEMENT WITH THE NODES
EXTRACTION TENSOR FORCED
POLAR REFERENCE MARK

ARC OF A CIRCLE
CENTER          : ( 0.000000E+00, 0.000000E+00)

```

RAY : 1.000000E-01
ANGULAR SECTOR : (0.000000E+00, 2.250000E+01)

T10 CONCEPT OF THE TYPE TABL_POST_RELE CALCULATES FROM THE CONCEPT SIGMA
TABLE: EX_10 EXIT OF THE T10 TABLE

	ABSC_CURV	COOR_X	COOR_Y	COOR_Z	SIXX	SIYY	SIZZ	SIXY
00000001	0.00000E+00	1.00000E-01	0.00000E+00	0.00000E+00	-9.80501E-01	1.64914E+00	2.00593E-01	2.07951E-01
00000002	7.85455E-03	9.96917E-02	7.84647E-03	0.00000E+00	-9.88675E-01	1.65731E+00	2.00591E-01	1.03814E-01
00000003	1.57084E-02	9.87688E-02	1.56438E-02	0.00000E+00	-9.88675E-01	1.65730E+00	2.00588E-01	1.03815E-01
00000004	2.35622E-02	9.72369E-02	2.33448E-02	0.00000E+00	-9.88674E-01	1.65730E+00	2.00589E-01	1.03810E-01
00000005	3.14159E-02	9.51056E-02	3.09017E-02	0.00000E+00	-9.88673E-01	1.65732E+00	2.00594E-01	1.03813E-01
00000006	3.92699E-02	9.23880E-02	3.82683E-02	0.00000E+00	-9.96843E-01	1.66550E+00	2.00598E-01	-3.06827E-04